


SOFFITTO INCASSO / CEILING BUILT-IT

# TINY ADJUSTABLE GHOST




**Alluminio**  
**Fascio di luce verso il basso**  
**Driver: escluso**

Aluminum  
 Light beam: downward-projected  
 Driver: excluded

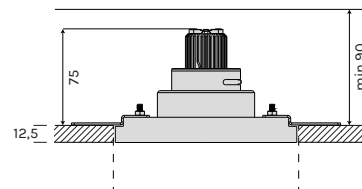


|                              | <b>M</b> 2700°K | <b>W</b> 3000°K | <b>N</b> 4000°K |
|------------------------------|-----------------|-----------------|-----------------|
| <b>Potenza/ Power</b>        | 1x 5,4W         | 1x 5,4W         | 1x 5,4W         |
| <b>Lumen</b>                 | 1x 534 lm       | 1x 557 lm       | 1x 627 lm       |
| <b>CRI</b>                   | 97              | 97              | 97              |
| <b>Alimentazione/ Supply</b> | 150mA           | 150mA           | 150mA           |



| Articolo<br>Item | Temperatura<br>Temperature | °Ottica<br>°Optic | Finitura<br>Finish |
|------------------|----------------------------|-------------------|--------------------|
| <b>4825</b>      | <b>M</b>                   | <b>10</b>         | <b>-BO</b>         |
|                  | <b>W</b>                   | <b>30</b>         | <b>-BV</b>         |
|                  | <b>N</b>                   |                   | <b>-NA</b>         |
|                  |                            |                   | <b>-OR</b>         |

## Controcassa / Outercasing

| Articolo<br>Item | Finitura<br>Finish |
|------------------|--------------------|
| <b>CN19</b>      | <b>-NA</b>         |



## Alimentatori in corrente remoto / Remote constant current drivers

---

| Articolo<br>Item | Potenza<br>Power | Dimensioni<br>Dimensions | N° art. alimentabili<br>N° of items powerable |
|------------------|------------------|--------------------------|---|
| <b>1A0331</b>    | 6W-150mA         | 50x22x40                 | 1   |
| <b>1A0340</b>    | 7,5W-140mA       | 108x22x52                | 1   |
| <b>1A0341</b>    | 7,5W-140mA       | 108x22x52                | 1   |

Il codice prodotto si compone mettendo uno dopo l'altro, da sinistra a destra, i dati nelle colonne gialle, es: 1111M12-AA  
The product code is created by putting in sequence the data under the yellow columns from left to right, e.g:1111M12-AA