


INDOOR - SUSPENSION

ASTRELLE ELLIX





- alluminio, vetro soffiato a bocca
- colore cavo: nero

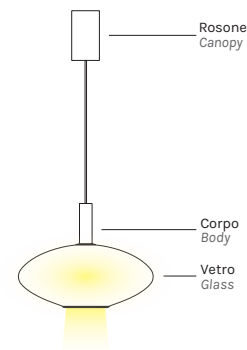

- aluminum, mouthblown glass
- cable color: black

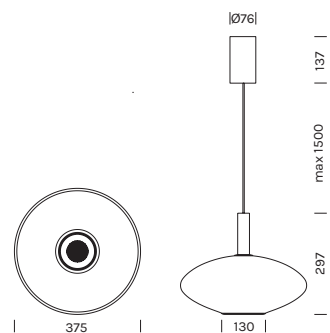

Con rosone e driver
With canopy and driver




	M 2700K	W 3000K
Power	↑ 6.0W ↓ 9.7W	↑ 6.0W ↓ 9.7W
Nominal lumen	↑ 714.0lm ↓ 1401.0lm	↑ 724.0lm ↓ 1475.0lm
Beam angle	↑ diffused ↓ 150°	↑ diffused ↓ 150°
CRI	>90	>90
Supply	220-240V	220-240V




Item	Temperature	Canopy	Body	Glass
3020	M	-FS		-ANE 
	W			

... composed by
RS04/03 (1Pz)
3024 (1Pz)

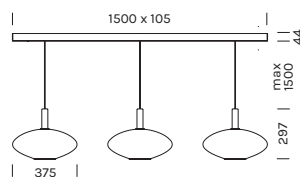Con rosone scorrevole e driver
With sliding canopy and driver



	M 2700K	W 3000K
Power	↑ 18.0W ↓ 29.1W	↑ 18.0W ↓ 29.1W
Nominal lumen	↑ 2142.0lm ↓ 4203.0lm	↑ 2172.0lm ↓ 4425.0lm
Beam angle	↑ diffused ↓ 150°	↑ diffused ↓ 150°
CRI	>90	>90
Supply	220-240V	220-240V

Item	Temperature	Canopy	Body	Glass
3028	M	-BI		-ANE 
	W	-NE		


... composed by
RS94/01 (1Pz)
3024 (3Pz)

Con rosone per incasso, senza driver

With recessed canopy, without driver

Necessita di driver remoto a 500mA oppure di convertitore da 48Vdc a 500mA più driver a 48Vdc

Requires 500mA remote driver, or 48Vdc to 500 mA converter and 48Vdc driver

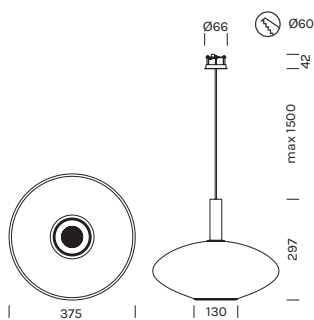

	M 2700K		W 3000K	
Power	↑6.0W	↓9.7W	↑6.0W	↓9.7W
Nominal lumen	↑714.0lm	↓1401.0lm	↑724.0lm	↓1475.0lm
Beam angle	↑diffused	↓150°	↑diffused	↓150°
CRI	>90		>90	
Supply	500mA		500mA	

Item	Temperature	Canopy	Body	Glass
------	-------------	--------	------	-------


3022	M	-NE		-FS		-ANE	
...composed by RS97 (1Pz) 3024 (1Pz)	W						

Solo corpo

Body only

Necessita di driver remoto a 500mA oppure di convertitore da 48Vdc a 500mA più driver a 48Vdc

Requires 500mA remote driver, or 48Vdc to 500 mA converter and 48Vdc driver

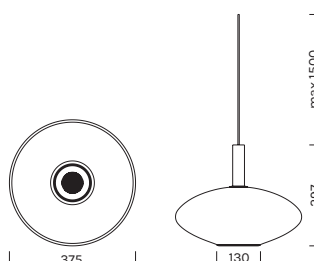

	M 2700K		W 3000K	
Power	↑6.0W	↓9.7W	↑6.0W	↓9.7W
Nominal lumen	↑714.0lm	↓1401.0lm	↑724.0lm	↓1475.0lm
Beam angle	↑diffused	↓150°	↑diffused	↓150°
CRI	>90		>90	
Supply	500mA		500mA	

Item	Temperature	Body	Glass
------	-------------	------	-------


3024	M	-FS		-ANE	
	W				

Solo corpo con cavo 5m

Body only with 5m cable

Necessita di driver remoto a 500mA oppure di convertitore da 48Vdc a 500mA più driver a 48Vdc

Requires 500mA remote driver, or 48Vdc to 500 mA converter and 48Vdc driver

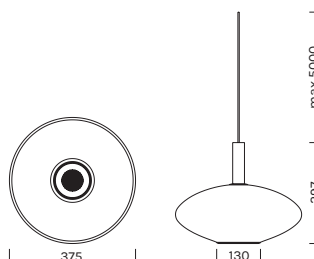

	M 2700K		W 3000K	
Power	↑6.0W	↓9.7W	↑6.0W	↓9.7W
Nominal lumen	↑714.0lm	↓1401.0lm	↑724.0lm	↓1475.0lm
Beam angle	↑diffused	↓150°	↑diffused	↓150°
CRI	>90		>90	
Supply	500mA		500mA	

Item	Temperature	Body	Glass
------	-------------	------	-------

3026	M	-FS		-ANE	
	W				

Driver in corrente in remoto 500mA

500mA remote constant current driver


Item	items powerable	Power	IP	Dimensions	Dimming
1A1858/01	1	20W	IP20	75x40x21	PUSH DALI

Convertitore da 48Vdc a 500mA

48Vdc to 500 mA converter

Necessita di driver remoto a 48Vdc

Requires 48V remote driver



Item	items powerable
2A7900	1

Driver 48Vdc in tensione in remoto

Remote constant voltage drivers 48Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0633	1-3	70W	IP20	210x45x49	ON-OFF
1A0634	1-6	150W	IP20	210x45x49	ON-OFF
1A1239	1-12	240W	IP67	244x68x39	ON-OFF
1A2493	1-18	320W	IP67	252x90x44	ON-OFF

Centraline dimmerabili in remoto

Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0837/48	288W	IP20	132x22x20	PUSH DALI 1-10V
1A0838/48	576W	IP20	164x38x25	PUSH DALI 0.1-10V