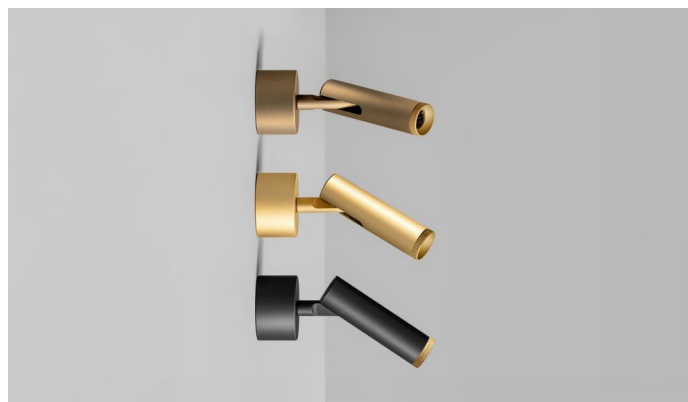



INDOOR - WALL


BEAM MASTER Ø25

- alluminio

- aluminum

**Con rosone, senza driver**

With canopy, without driver

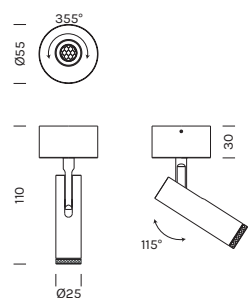

	4360	M 2700K	W 3000K	N 4000K
Power	4.2W		4.2W	4.2W
Nominal lumen	490.0lm		513.0lm	550.0lm
CRI	>90		>90	>90
Supply	24Vdc		24Vdc	24Vdc

Item	Temperature	°Optic	Ring	Body
4360	M	06	-BO	-BO
	W	35	-NO	-NO
	N		-BV	-BV
			-OR	-OR
			-RR	-RR
			-TI	-TI

Driver 24Vdc in tensione in remoto

Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0150	1-4	30W	IP20	154x50x14	ON-OFF
1A1910	1-8	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-7	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-15	100W	IP20	190x65x22	PUSH DALI
1A1999	1-15	100W	IP20	201x63x30	L-C

Centraline dimmerabili in remoto

Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0837/24	144W	IP20	132x22x20	PUSH DALI 1-10V
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0.1-10V