


INDOOR - SUSPENSION

BEAM STICK METAL Ø60 H200




- alluminio
- colore cavo: nero

- aluminum
- cable color: black




Con rosone e driver
With canopy and driver



	M 2700K	W 3000K	N 4000K
Power	9.4W	9.4W	9.4W
Nominal lumen	1090.4lm	1137.4lm	1175.0lm
CRI	>90	>90	>90
Supply	220-240V	220-240V	220-240V

Item	Temperature	°Optic	Canopy	Ring	Body
4574 composed by RS03/02 (1Pz) 4535 (1Pz)	M	12	-BO	-BO	-BO
	W	35	-NO	-NO	-NO
	N	55	-BV	-BV	-BV
			-OR	-OR	-OR
			-RR	-RR	-RR
			-TI	-TI	-TI


Con rosone e driver
With canopy and driver



	M 2700K	W 3000K	N 4000K
Power	9.4W	9.4W	9.4W
Nominal lumen	1090.4lm	1137.4lm	1175.0lm
CRI	>90	>90	>90
Supply	220-240V	220-240V	220-240V

Item	Temperature	°Optic	Canopy	Ring	Body
4636 composed by RS03/03 (1Pz) 4535 (1Pz)	M	12	-BO	-BO	-BO
	W	35	-NO	-NO	-NO
	N	55	-BV	-BV	-BV
			-OR	-OR	-OR
			-RR	-RR	-RR
			-TI	-TI	-TI

Con rosone e driver
With canopy and driver



4637	M 2700K	W 3000K	N 4000K
Power	9.4W	9.4W	9.4W
Nominal lumen	1090.4lm	1137.4lm	1175.0lm
CRI	>90	>90	>90
Supply	220-240V	220-240V	220-240V

Item	Temperature	°Optic	Canopy	Ring	Body
4637 ...composed by RS03/04 (1Pz) 4535 (1Pz)	M	12	-BO	-BO	-BO
	W	35	-NO	-NO	-NO
	N	55	-BV	-BV	-BV
			-OR	-OR	-OR
			-RR	-RR	-RR
			-TI	-TI	-TI

Con rosone, senza driver
With canopy, without driver



Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver




4572	M 2700K	W 3000K	N 4000K
Power	9.4W	9.4W	9.4W
Nominal lumen	1090.4lm	1137.4lm	1175.0lm
CRI	>90	>90	>90
Supply	500mA	500mA	500mA

Item	Temperature	°Optic	Canopy	Ring	Body
4572 ...composed by RS01 (1Pz) 4535 (1Pz)	M	12	-BO	-BO	-BO
	W	35	-NO	-NO	-NO
	N	55	-BV	-BV	-BV
			-OR	-OR	-OR
			-RR	-RR	-RR
			-TI	-TI	-TI

Con rosone piatto per cartongesso, senza driver
With flat rosette for plasterboard, without driver



Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver



4573	M 2700K	W 3000K	N 4000K
Power	9.4W	9.4W	9.4W
Nominal lumen	1090.4lm	1137.4lm	1175.0lm
CRI	>90	>90	>90
Supply	500mA	500mA	500mA

Item	Temperature	°Optic	Canopy	Ring	Body
4573 ...composed by RS06 (1Pz) 4535 (1Pz)	M	12	-BO	-BO	-BO
	W	35	-NO	-NO	-NO
	N	55	-BV	-BV	-BV
			-OR	-OR	-OR
			-RR	-RR	-RR
			-TI	-TI	-TI

Solo corpo

Body only



Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver



4535	M 2700K	W 3000K	N 4000K
Power	9.4W	9.4W	9.4W
Nominal lumen	1090.4lm	1137.4lm	1175.0lm
CRI	>90	>90	>90
Supply	500mA	500mA	500mA

Item	Temperature	°Optic	Ring	Body
4535	M	12	-BO	-BO
	W	35	-NO	-NO
	N	55	-BV	-BV
			-OR	-OR
			-RR	-RR
		-TI	-TI	-TI

Driver in corrente in remoto 500mA


500mA remote constant current driver

Item	items powerable	Power	IP	Dimensions	Dimming
1A2399	1	10W	IP20	102x38x21	L-C

Convertitore da 24Vdc a 500mA

24Vdc to 500 mA converter

Necessita di driver remoto a 24Vdc
Requires 24V remote driver



Item	items powerable
2A4843	1

Driver 24Vdc in tensione in remoto

Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0150	1-2	30W	IP20	154x50x14	ON-OFF
1A1910	1-4	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-7	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-7	100W	IP20	190x65x22	PUSH DALI
1A1999	1-7	100W	IP20	201x63x30	L-C


Centraline dimmerabili in remoto

Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0837/24	144W	IP20	132x22x20	PUSH DALI 1-10V
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0.1-10V

Jack per track 48V + Connettore nero


Jack for track 48V + black connector

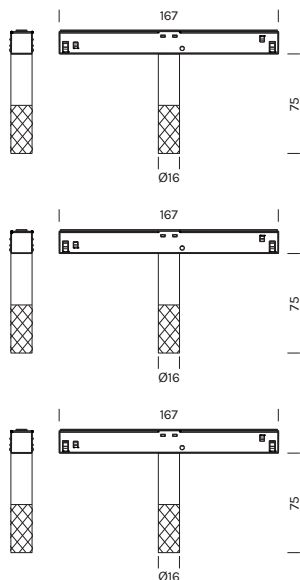

Item	Finish	Dimming
201/01	-JBI	ON-OFF
	-JNE	
201/02	-JBI	0-10V
	-JNE	
201/03	-JBI	DALI
	-JNE	


Jack per track 230V + Connettore nero

Jack for track 230V + black connector

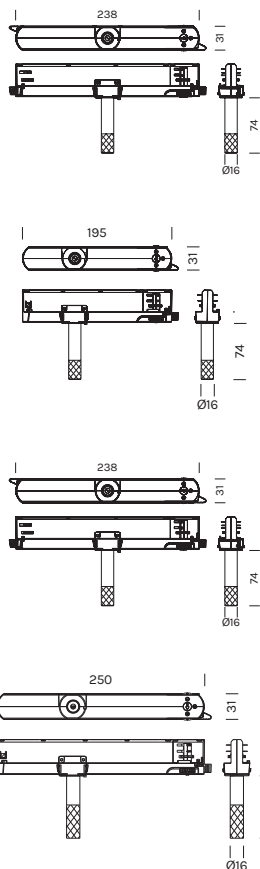

Item	Finish	Dimming
211/02	-JBI	ON-OFF
	-JNE	
211/05	-JBI	L-C
	-JNE	
211/06	-JBI	DALI
	-JNE	
211/09	-JBI	CASAMBI
	-JNE	

Passacavi
Cable entry



Item	Finish
BEAMKIT01	-NA
BEAMKIT02	-NA