INDOOR - SUSPENSION

BEAM STICK METAL Ø80 H80

- alluminio
- colore cavo: nero

- aluminum
- cable color: black



Con rosone e driver
With canopy and driver

4580	**M** 2700K	**W** 3000K	**N** 4000K
Power	13.2W	13.2W	13.2W
Nominal lumen	1526.6lm	1592.4lm	1645.0lm
CRI	>90	>90	>90
Supply	220-240V	220-240V	220-240V

Item	Temperature	°Optic	Canopy	Ring	Body
4580 composed by RS04/11 (1Pz) 4537 (1Pz)	**M** **W** **N**	**12** **35** **55**	**-BO** **-NO** **-BV** **-OR** **-RR** **-TI**	**-BO** **-NO** **-BV** **-OR** **-RR** **-TI**	**-BO** **-NO** **-BV** **-OR** **-RR** **-TI**

Con rosone e driver
With canopy and driver

4644	**M** 2700K	**W** 3000K	**N** 4000K
Power	13.2W	13.2W	13.2W
Nominal lumen	1526.6lm	1592.4lm	1645.0lm
CRI	>90	>90	>90
Supply	220-240V	220-240V	220-240V

Item	Temperature	°Optic	Canopy	Ring	Body
4644 composed by RS04/13 (1Pz) 4537 (1Pz)	**M** **W** **N**	**12** **35** **55**	**-BO** **-NO** **-BV** **-OR** **-RR** **-TI**	**-BO** **-NO** **-BV** **-OR** **-RR** **-TI**	**-BO** **-NO** **-BV** **-OR** **-RR** **-TI**

Con rosone e driver
With canopy and driver

4645	M 2700K	W 3000K	N 4000K
Power	13.2W	13.2W	13.2W
Nominal lumen	1526.6lm	1592.4lm	1645.0lm
CRI	>90	>90	>90
Supply	220-240V	220-240V	220-240V

Item	Temperature	°Optic	Canopy	Ring	Body
4645 composed by RS04/22 (1Pz) 4537 (1Pz)	M W N	12 35 55	-BO -NO -BV -OR -RR -TI	-BO -NO -BV -OR -RR -TI	-BO -NO -BV -OR -RR -TI

Con rosone, senza driver
With canopy, without driver

Necessita di driver remoto a 700mA oppure di convertitore da 24Vdc a 700mA più driver a 24Vdc
Requires 700mA remote driver, or 24Vdc to 700 mA converter and 24Vdc driver

4578	M 2700K	W 3000K	N 4000K
Power	13.2W	13.2W	13.2W
Nominal lumen	1526.6lm	1592.4lm	1645.0lm
CRI	>90	>90	>90
Supply	700mA	700mA	700mA

Item	Temperature	°Optic	Canopy	Ring	Body
4578 composed by RS01 (1Pz) 4537 (1Pz)	M W N	12 35 55	-BO -NO -BV -OR -RR -TI	-BO -NO -BV -OR -RR -TI	-BO -NO -BV -OR -RR -TI

Con rosone piatto per cartongesso, senza driver
With flat rosette for plasterboard, without driver

Necessita di driver remoto a 700mA oppure di convertitore da 24Vdc a 700mA più driver a 24Vdc
Requires 700mA remote driver, or 24Vdc to 700 mA converter and 24Vdc driver



4579	M 2700K	W 3000K	N 4000K
Power	13.2W	13.2W	13.2W
Nominal lumen	1526.6lm	1592.4lm	1645.0lm
CRI	>90	>90	>90
Supply	700mA	700mA	700mA

Item	Temperature	°Optic	Canopy	Ring	Body
4579 composed by RS06 (1Pz) 4537 (1Pz)	M W N	12 35 55	-BO -NO -BV -OR -RR -TI	-BO -NO -BV -OR -RR -TI	-BO -NO -BV -OR -RR -TI

Solo corpo
Body only

Necessita di driver remoto a 700mA oppure di convertitore da 24Vdc a 700mA più driver a 24Vdc
Requires 700mA remote driver, or 24Vdc to 700 mA converter and 24Vdc driver



4537	M 2700K	W 3000K	N 4000K
Power	13.2W	13.2W	13.2W
Nominal lumen	1526.6lm	1592.4lm	1645.0lm
CRI	>90	>90	>90
Supply	700mA	700mA	700mA

Item	Temperature	°Optic	Ring	Body
4537	M	12	-BO	-BO
	W	35	-NO	-NO
	N	55	-BV	-BV
			-OR	-OR
			-RR	-RR
			-TI	-TI

Driver in corrente in remoto 500mA
500mA remote constant current driver

Item	items powerable	Power	IP	Dimensions	Dimming
1A0682	1	20W	IP20	111x52x22	L-C

Convertitore da 24Vdc a 700mA
24Vdc to 700 mA converter

Necessita di driver remoto a 24Vdc
Requires 24V remote driver



Item	items powerable
2A7814	1

Driver 24Vdc in tensione in remoto
Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A1910	1-3	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-6	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-6	100W	IP20	190x65x22	PUSH | DALI
1A1999	1-6	100W	IP20	201x63x30	L-C

Centraline dimmerabili in remoto
Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0837/24	144W	IP20	132x22x20	PUSH | DALI | 1-10V
1A0838/24	288W	IP20	164x38x25	PUSH | DALI | 0.1-10V

Jack per track 48V + Connettore nero
Jack for track 48V + black connector

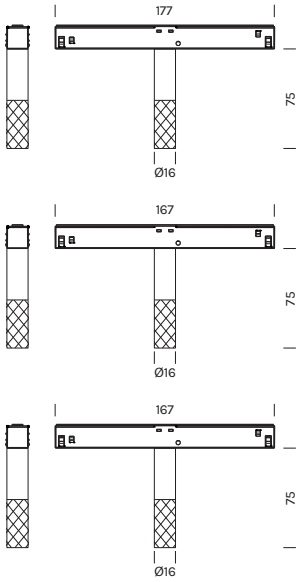

Item	Finish	Dimming
201/04	**-JBI** **-JNE** ■	ON-OFF
201/05	**-JBI** **-JNE** ■	0-10V
201/06	**-JBI** **-JNE** ■	DALI

Jack per track 230V + Connettore nero
Jack for track 230V + black connector

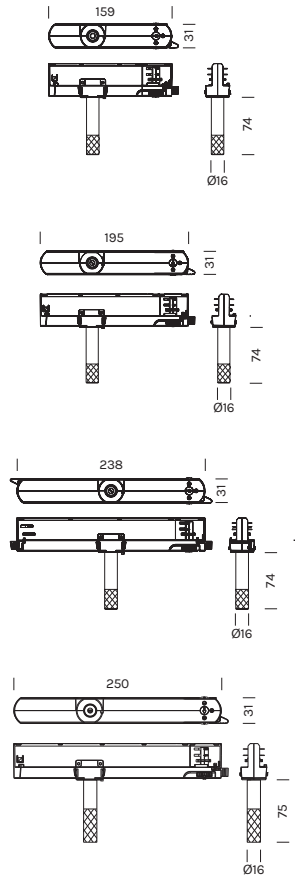

Item	Finish	Dimming
211/01	**-JBI** **-JNE** ■	ON-OFF
211/08	**-JBI** **-JNE** ■	L-C
211/07	**-JBI** **-JNE** ■	DALI
211/10	**-JBI** **-JNE** ■	CASAMBI

Passacavi
Cable entry



Item	Finish	
BEAMKIT01	**-NA**	■
BEAMKIT02	**-NA**	■