


INDOOR - SUSPENSION

BEAM STICK NUANCE Ø200



- alluminio, vetro soffiato a bocca
- colore cavo: nero


- aluminum, mouthblown glass
- cable color: black



Con rosone e driver
With canopy and driver



0,27 m³ - 2,0 kg (net weight 1,5 kg)




4692	M 2700K	W 3000K					
Power	↑ 4.3W ↓ 4.3W	↑ 4.3W ↓ 4.3W					
Nominal lumen	↑ 492.0lm ↓ 492.0lm	↑ 523.0lm ↓ 523.0lm					
Beam angle	↑ diffused ↓ 36°	↑ diffused ↓ 36°					
Supply	220-240V	220-240V					
Item	Temperature	Canopy	Body	Glass			
4692 composed by 1 x RS03/02 1 x 4682	M	-BO		-BO		-VBI	
	W	-NO		-NO		-VBL	
		-BV		-BV		-VTM	
		-OR		-OR		-VAM	
		-RR		-RR		-VRS	
		-TI		-TI		-VFU	
		-VF		-VF		-VVF	
						-BAM	
						-BTM	
						-BVF	

Con rosone e driver

With canopy and driver



0,27 m³ - 2,0 kg (net weight 1,5 kg)



4694	M 2700K		W 3000K	
Power	↑ 4.3W	↓ 4.3W	↑ 4.3W	↓ 4.3W
Nominal lumen	↑ 492.0lm	↓ 492.0lm	↑ 523.0lm	↓ 523.0lm
Beam angle	↑ diffused	↓ 36°	↑ diffused	↓ 36°
Supply	220-240V		220-240V	


Item	Temperature	Canopy	Body	Glass
4694composed by 1 x RS03/04 1 x 4682	M	-BO	-BO	-VBI
	W	-NO	-NO	-VBL
		-BV	-BV	-VTM
		-OR	-OR	-VAM
		-RR	-RR	-VRS
		-TI	-TI	-VFU
		-VF	-VF	-VVF
				-BAM
				-BTM
				-BVF

Con rosone e driver

With canopy and driver



0,27 m³ - 2,0 kg (net weight 1,5 kg)



4693	M 2700K		W 3000K	
Power	↑ 4.3W	↓ 4.3W	↑ 4.3W	↓ 4.3W
Nominal lumen	↑ 492.0lm	↓ 492.0lm	↑ 523.0lm	↓ 523.0lm
Beam angle	↑ diffused	↓ 36°	↑ diffused	↓ 36°
Supply	220-240V		220-240V	


Item	Temperature	Canopy	Body	Glass
4693composed by 1 x RS03/03 1 x 4682	M	-BO	-BO	-VBI
	W	-NO	-NO	-VBL
		-BV	-BV	-VTM
		-OR	-OR	-VAM
		-RR	-RR	-VRS
		-TI	-TI	-VFU
		-VF	-VF	-VVF
				-BAM
				-BTM
				-BVF

Con rosone, senza driver

With canopy, without driver

Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver

0,00 m³ - 0,0 kg (net weight 0,0 kg)



4690	M 2700K		W 3000K	
Power	↑ 4.3W	↓ 4.3W	↑ 4.3W	↓ 4.3W
Nominal lumen	↑ 492.0lm	↓ 492.0lm	↑ 523.0lm	↓ 523.0lm
Beam angle	↑ diffused	↓ 36°	↑ diffused	↓ 36°
Supply	500mA		500mA	


Item	Temperature	Canopy	Body	Glass
4690composed by 1 x RS01 1 x 4682	M	-BO	-BO	-VBI
	W	-NO	-NO	-VBL
		-BV	-BV	-VTM
		-OR	-OR	-VAM
		-RR	-RR	-VRS
		-TI	-TI	-VFU
		-VF	-VF	-VVF
				-BAM
				-BTM
				-BVF

Con rosone per incasso, senza driver

With recessed canopy, without driver

Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver

0,00 m³ - 0,0 kg (net weight 0,0 kg)



4695	M 2700K		W 3000K	
Power	↑ 4.3W	↓ 4.3W	↑ 4.3W	↓ 4.3W
Nominal lumen	↑ 492.0lm	↓ 492.0lm	↑ 523.0lm	↓ 523.0lm
Beam angle	↑ diffused	↓ 36°	↑ diffused	↓ 36°
Supply	500mA		500mA	

Item	Temperature	Canopy	Body	Glass
4695composed by 1 x RS97 1 x 4682	M	-NE	-BO	-VBI
	W		-NO	-VBL
			-BV	-VTM
			-OR	-VAM
			-RR	-VRS
			-TI	-VFU
			-VF	-VVF
				-BAM
				-BTM
				-BVF


Solo corpo

Body only

Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver



0,27 m³ - 2,0 kg (net weight 1,5 kg)



4682	M 2700K		W 3000K		
Power	↑ 4.3W	↓ 4.3W	↑ 4.3W	↓ 4.3W	
Nominal lumen	↑ 492.0lm	↓ 492.0lm	↑ 523.0lm	↓ 523.0lm	
Beam angle	↑ diffused	↓ 36°	↑ diffused	↓ 36°	
Supply	500mA		500mA		
Item	Temperature	Body	Glass		
4682	M	-BO		-VBI	
	W	-NO		-VBL	
		-BV		-VTM	
		-OR		-VAM	
		-RR		-VRS	
		-TI		-VFU	
		-VF		-VVF	
				-BAM	
				-BTM	
				-BVF	


Solo corpo con cavo 5m

Body only with 5m cable

Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver



0,27 m³ - 2,0 kg (net weight 1,5 kg)



4682/01	M 2700K	W 3000K	
Power	↑ 4.3W ↓ 4.3W	↑ 4.3W ↓ 4.3W	
Nominal lumen	↑ 492.0lm ↓ 492.0lm	↑ 523.0lm ↓ 523.0lm	
Beam angle	↑ diffused ↓ 36°	↑ diffused ↓ 36°	
Supply	500mA	500mA	
Item	Temperature	Body	Glass
4682/01	M	-BO	-VBI
	W	-NO	-VBL
		-BV	-VTM
		-OR	-VAM
		-RR	-VRS
		-TI	-VFU
		-VF	-VVF
			-BAM
			-BTM
			-BVF

Driver in corrente in remoto 500mA


500mA remote constant current driver

Item	items powerable	Power	IP	Dimensions	Dimming
1A2399	1	10W	IP20	102x38x21	L-C

Convertitore da 24Vdc a 500mA

24Vdc to 500 mA converter

Necessita di driver remoto a 24Vdc
Requires 24V remote driver



Item	items powerable
2A4843	1

Driver 24Vdc in tensione in remoto

Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0150	1-2	30W	IP20	156x50x17	ON-OFF
1A1910	1-4	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-7	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-7	100W	IP20	190x65x22	PUSH DALI
1A1999	1-7	100W	IP20	201x63x30	L-C

Centraline dimmerabili in remoto


Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0837/24	144W	IP20	132x22x20	PUSH DALI 1-10V
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0.1-10V

Rosoni rotondi con driver

Round canopies with driver

3 Sospensioni
3 suspensions



Item	Finish	Dimming
RS88/02	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	


3 Sospensioni
3 suspensions

RS88/03	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	

3 Sospensioni
3 suspensions

RS88/01	-BI	L-C
	-NE	
	-BP	

4 Sospensioni
4 suspensions



RS88/05	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	


4 Sospensioni
4 suspensions

RS88/06	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	

4 Sospensioni
4 suspensions

RS88/04	-BI	L-C
	-NE	
	-BP	

6 Sospensioni
6 suspensions



RS88/08	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	


6 Sospensioni
6 suspensions

RS88/09	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	

6 Sospensioni
6 suspensions

RS88/07	-BI	L-C
	-NE	
	-BP	


9 Sospensioni
9 suspensions



9 Sospensioni
9 suspensions

9 Sospensioni
9 suspensions

10 Sospensioni
10 suspensions



10 Sospensioni
10 suspensions

10 Sospensioni
10 suspensions

RS89/02

-BI



ON-OFF | PUSH | DALI | 0.1-10V

-NE



-BP



RS89/03

-BI



ON-OFF | PUSH | CASAMBI

-NE



-BP



RS89/01

-BI



L-C

-NE



-BP



RS89/05

-BI



ON-OFF | PUSH | DALI | 0.1-10V

-NE



-BP



RS89/06

-BI



ON-OFF | PUSH | CASAMBI

-NE



-BP



RS89/04

-BI



L-C

-NE




-BP



Rosoni rettangolari con driver

Square canopies with driver


3 Sospensioni
3 suspensions



3 Sospensioni
3 suspensions

3 Sospensioni
3 suspensions


4 Sospensioni
4 suspensions



4 Sospensioni
4 suspensions

4 Sospensioni
4 suspensions

6 Sospensioni
6 suspensions



6 Sospensioni
6 suspensions


6 Sospensioni
6 suspensions

Item	Finish	Dimming
RS58/01	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS58/02	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	
RS58/03	-BI	L-C
	-NE	
	-BP	
RS58/11	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS58/12	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	
RS58/13	-BI	L-C
	-NE	
	-BP	
RS58/21	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS58/22	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	
RS58/23	-BI	L-C
	-NE	
	-BP	

Rosone scorrevole con driver

Sliding canopy with driver

Max 5 Sospensioni
Up to 5 suspensions




Item	Finish	Dimming
RS94/01	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	

Rosone con driver + staffa Batacù per decentramento 1pz

Canopy with driver + Batacù bracket for decentralization 1pc

Necessita di lampada versione "Solo corpo con cavo 5m"

Requires "Body only with 5m cable" lamp version




Item	Finish	Dimming
521	-NE	PUSH DALI
...composed by 1 x RS69 1 x 520		

Rosone con driver + staffa Batacù per decentramento 3pz

Canopy with driver + Batacù bracket for decentralization 3pcs

Necessita di lampada versione "Solo corpo con cavo 5m"


Requires "Body only with 5m cable" lamp version



Item	Finish	Dimming
523	-NE	PUSH DALI
...composed by 1 x RS92 3 x 520		

Jack per track 48V + Connettore nero


Jack for track 48V + black connector

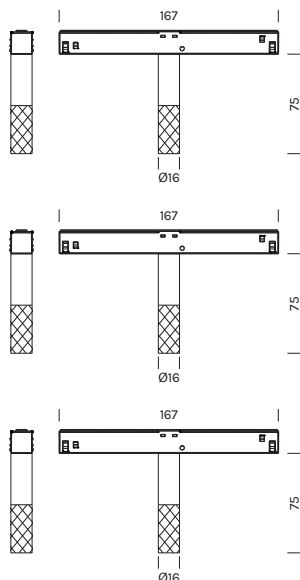

Item	Finish	Dimming
201/01	-JBI	ON-OFF
	-JNE	
201/02	-JBI	0-10V
	-JNE	
201/03	-JBI	DALI
	-JNE	

Jack per track 230V + Connettore nero



Jack for track 230V + black connector

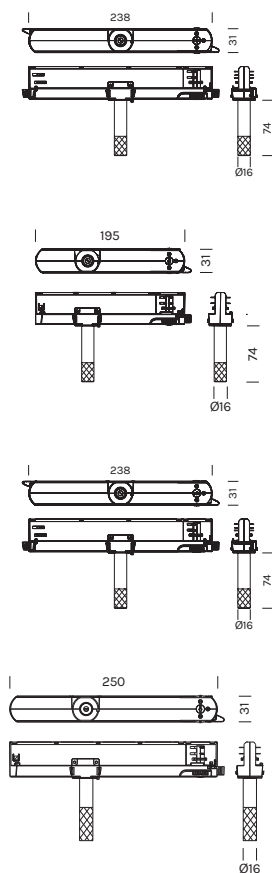

Item	Finish	
211/02	-JBI	
	-JNE	
211/05	-JBI	L-C
	-JNE	
211/06	-JBI	DALI
	-JNE	
211/09	-JBI	CASAMBI
	-JNE	

Passacavi

Cable entry



Item	Finish
BEAMKIT01	-NA 
BEAMKIT02	-NA 