



INDOOR - CEILING

BEAM STICK PL Ø60 H80

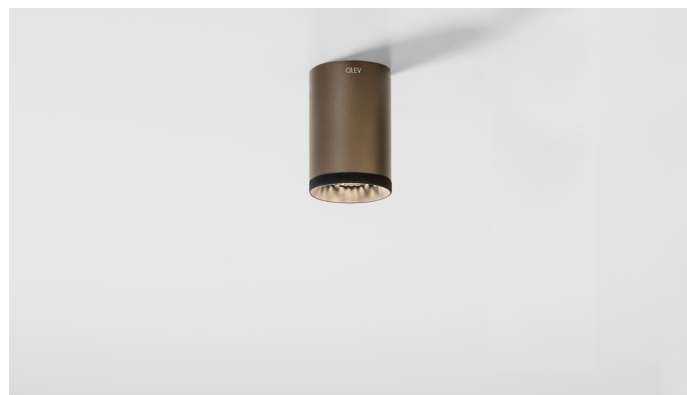

- alluminio

- aluminum



Con rosone

With canopy

Necessita di driver remoto a 24Vdc

Requires 24V remote driver



4244	M 2700K		W 3000K		N 4000K	
Power	9.4W		9.4W		9.4W	
Nominal lumen	1090.4lm		1137.4lm		1175.0lm	
CRI	>90		>90		>90	
Supply	24Vdc		24Vdc		24Vdc	
Item	Temperature	°Optic	Ring		Body	
4244	M	12	-BO		-BO	
	W	35	-NO		-NO	
	N	55	-BV		-BV	
			-OR		-OR	
			-RR		-RR	
			-TI		-TI	

Driver 24Vdc in tensione in remoto

Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0150	1-2	30W	IP20	154x50x14	ON-OFF
1A1910	1-4	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-7	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-7	100W	IP20	190x65x22	PUSH DALI
1A1999	1-7	100W	IP20	201x63x30	L-C

Centraline dimmerabili in remoto

Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0837/24	144W	IP20	132x22x20	PUSH DALI 1-10V
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0.1-10V