


INDOOR - SUSPENSION

CURUBA




- alluminio, vetro soffiato a bocca
- colore cavo: nero

- aluminum, mouthblown glass
- cable color: black

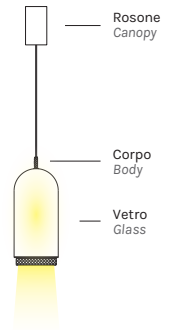


Con rosone e driver
With canopy and driver

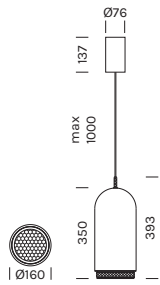

	M 2700K	W 3000K
Power	↑4.2W ↓13.6W	↑4.2W ↓13.6W
Nominal lumen	↑727.0lm ↓2544.0lm	↑727.0lm ↓2584.0lm
Beam angle	↑diffused ↓70°	↑diffused ↓70°
CRI	>90	>90
Supply	220-240V	220-240V

Item	Temperature	Canopy	Body	Glass			
2603 ...composed by RS04/02 (1Pz) 2612 (1Pz)	M	-BO		-BO		-VBI	
		-NO		-NO		-VBL	
	W	-BV		-BV		-VTM	
		-OR		-OR		-VAM	
		-RR		-RR		-VRS	
		-TI		-TI		-VFU	
		-VF		-VF		-VVF	
		-BBI					
		-BBL					
		-BTM					
		-BAM					
		-BFU					
		-BVF					

Con rosone e driver
With canopy and driver

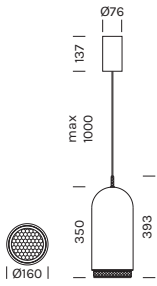


2602	M 2700K	W 3000K
Power	↑4.2W ↓13.6W	↑4.2W ↓13.6W
Nominal lumen	↑727.0lm ↓2544.0lm	↑727.0lm ↓2584.0lm
Beam angle	↑diffused ↓70°	↑diffused ↓70°
CRI	>90	>90
Supply	220-240V	220-240V

Item	Temperature	Canopy	Body	Glass			
2602 ...composed by RS04/03 (1Pz) 2612 (1Pz)	M	-BO		-BO		-VBI	
	W	-NO		-NO		-VBL	
		-BV		-BV		-VTM	
		-OR		-OR		-VAM	
		-RR		-RR		-VRS	
		-TI		-TI		-VFU	
		-VF		-VF		-VVF	
		-BBI				-BBI	
		-BBL				-BBL	
		-BTM				-BTM	
-BAM				-BAM			
-BFU				-BFU			
-BVF				-BVF			

Con rosone per incasso, senza driver
With recessed canopy, without driver



Necessita di driver remoto a 500mA oppure di convertitore da 48Vdc a 500mA più driver a 48Vdc
Requires 500mA remote driver, or 48Vdc to 500 mA converter and 48Vdc driver

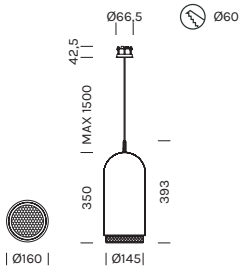


2601	M 2700K	W 3000K
Power	↑4.2W ↓13.6W	↑4.2W ↓13.6W
Nominal lumen	↑727.0lm ↓2544.0lm	↑727.0lm ↓2584.0lm
Beam angle	↑diffused ↓70°	↑diffused ↓70°
CRI	>90	>90
Supply	500mA	500mA

Item	Temperature	Canopy	Body	Glass				
2601 ...composed by RS97 (1Pz) 2612 (1Pz)	M	-NE		-BO		-VBI		
	W	-NO			-NO		-VBL	
		-BV			-BV		-VTM	
		-OR			-OR		-VAM	
		-RR			-RR		-VRS	
		-TI			-TI		-VFU	
		-VF			-VF		-VVF	
		-BBI				-BBI		
		-BBL				-BBL		
		-BTM				-BTM		
-BAM				-BAM				
-BFU				-BFU				
-BVF				-BVF				

Solo corpo
Body only



Necessita di driver remoto a 500mA oppure di convertitore da 48Vdc a 500mA più driver a 48Vdc
Requires 500mA remote driver, or 48Vdc to 500 mA converter and 48Vdc driver




	M 2700K		W 3000K	
Power	↑4.2W	↓13.6W	↑4.2W	↓13.6W
Nominal lumen	↑727.0lm	↓2544.0lm	↑727.0lm	↓2584.0lm
Beam angle	↑diffused	↓70°	↑diffused	↓70°
CRI	>90		>90	
Supply	500mA		500mA	

Item	Temperature	Body	Glass
2612	M	-BO	-VBI
		-NO	-VBL
	W	-BV	-VTM
		-OR	-VAM
		-RR	-VRS
		-TI	-VFU
		-VF	-VVF
		-BBI	
		-BBL	
		-BTM	
		-BAM	
		-BFU	
	-BVF		

Solo corpo con cavo 5m
Body only with 5m cable



Necessita di driver remoto a 500mA oppure di convertitore da 48Vdc a 500mA più driver a 48Vdc
Requires 500mA remote driver, or 48Vdc to 500 mA converter and 48Vdc driver



	M 2700K		W 3000K	
Power	↑4.2W	↓13.6W	↑4.2W	↓13.6W
Nominal lumen	↑727.0lm	↓2544.0lm	↑727.0lm	↓2584.0lm
Beam angle	↑diffused	↓70°	↑diffused	↓70°
CRI	>90		>90	
Supply	500mA		500mA	

Item	Temperature	Body	Glass
2612/01	M	-BO	-VBI
		-NO	-VBL
	W	-BV	-VTM
		-OR	-VAM
		-RR	-VRS
		-TI	-VFU
		-VF	-VVF
		-BBI	
		-BBL	
		-BTM	
		-BAM	
		-BFU	
	-BVF		


Driver in corrente in remoto 500mA

500mA remote constant current driver

Item	items powerable	Power	IP	Dimensions	Dimming
1A1858/01	1	20W	IP20	75x40x21	PUSH DALI

Convertitore da 48Vdc a 500mA

48Vdc to 500 mA converter

Necessita di driver remoto a 48Vdc
Requires 48V remote driver

Item	items powerable
2A7900	1

Driver 48Vdc in tensione in remoto

Remote constant voltage drivers 48Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0633	1-2	70W	IP20	210x45x49	ON-OFF
1A0634	1-4	150W	IP20	210x45x49	ON-OFF
1A1239	1-6	240W	IP67	244x68x39	ON-OFF
1A2493	1-8	320W	IP67	252x90x44	ON-OFF


Centraline dimmerabili in remoto

Remote dimmable controllers


Item	Power	IP	Dimensions	Dimming
1A0837/48	288W	IP20	132x22x20	PUSH DALI 1-10V
1A0838/48	576W	IP20	164x38x25	PUSH DALI 0.1-10V

Rosoni rotondi con driver
Round canopies with driver

3 Sospensioni
3 suspensions



3 Sospensioni
3 suspensions




4 Sospensioni
4 suspensions

4 Sospensioni
4 suspensions


Item	Finish	Dimming
RS88/02	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS88/03	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	
RS88/05	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS88/06	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	

Rosoni rettangolari con driver
Square canopies with driver

3 Sospensioni
3 suspensions



3 Sospensioni
3 suspensions




4 Sospensioni
4 suspensions

4 Sospensioni
4 suspensions

Rosone scorrevole con driver
Sliding canopy with driver

Max 5 Sospensioni
Up to 5 suspensions



Item	Finish	Dimming
RS58/01	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS58/02	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	
RS58/11	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	
RS58/12	-BI	ON-OFF PUSH CASAMBI
	-NE	
	-BP	


Item	Finish	Dimming
RS94/01	-BI	ON-OFF PUSH DALI 0.1-10V
	-NE	
	-BP	

Rosone con driver + staffa Batacù per decentramento 1pz

Canopy with driver + Batacù bracket for decentralization 1pc

Necessita di lampada versione "Solo corpo con cavo 5m"

Requires "Body only with 5m cable" lamp version




Item	Finish	Dimming
521 ...composed by RS69 (1Pz) 520 (1Pz)	-NE ■	PUSH DALI

Rosone con driver + staffa Batacù per decentramento 3pz

Canopy with driver + Batacù bracket for decentralization 3pcs


Necessita di lampada versione "Solo corpo con cavo 5m"

Requires "Body only with 5m cable" lamp version

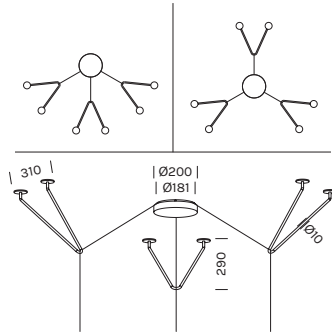


Item	Finish	Dimming
523 ...composed by RS92 (1Pz) 520 (3Pz)	-NE ■	PUSH DALI


Jack per track 230V + Connettore nero
 Jack for track 230V + black connector

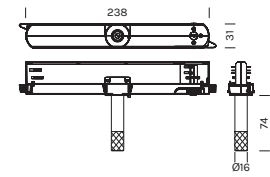


Item	Finish	Dimming
211/02	-JBI	ON-OFF
	-JNE	



211/05	-JBI	L-C
	-JNE	

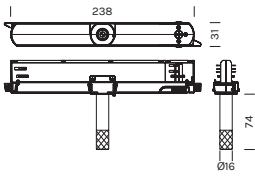


211/06	-JBI	DALI
	-JNE	

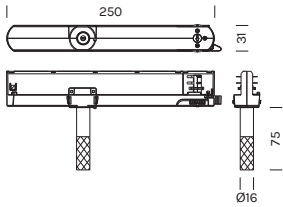

211/09	-JBI	CASAMBI
	-JNE	

Passacavi
 Cable entry

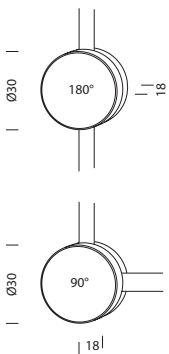

Item	Finish
103	-NA
104	-NA