

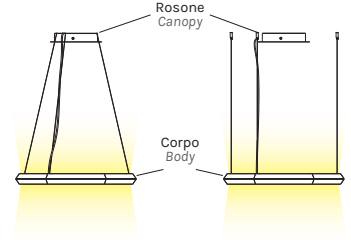
INDOOR - SUSPENSION

EXAGON BIOLIGHT




- alluminio, policarbonato

- aluminum, polycarbonate



Con rosone e driver, cavi inclinati

With canopy and driver, slanted cables



9760 D 2700/6500K

Power ↑25.9W ↓47.5W

Nominal lumen ↑1218.0lm ↓1218.0lm

CRI >90


Supply 220-240V

Item	Temperature	Canopy	Body
9760	D	-BV	-BR

...composed by
RS39/02 (1Pz)
9700 (1Pz)

Con rosone e driver, cavi inclinati

With canopy and driver, slanted cables



9761 D 2700/6500K

Power ↑38.9W ↓73.4W

Nominal lumen ↑1218.0lm ↓1218.0lm

CRI >90


Supply 220-240V

Item	Temperature	Canopy	Body
9761	D	-BV	-BR

...composed by
RS39/02 (1Pz)
9701 (1Pz)

Con rosone e driver, cavi inclinati

With canopy and driver, slanted cables



9762 D 2700/6500K

Power ↑47.5W ↓90.7W

Nominal lumen ↑1218.0lm ↓1218.0lm

CRI >90


Supply 220-240V

Item	Temperature	Canopy	Body
9762	D	-BV	-BR

...composed by
RS39/02 (1Pz)
9702 (1Pz)

Con rosone e driver, cavi inclinati

With canopy and driver, slanted cables


**9763** D 2700/6500K**Power** ↑60.5W ↓116.6W**Nominal lumen** ↑1218.0lm ↓1218.0lm**CRI** >90**Supply** 220-240V

Item	Temperature	Canopy	Body
9763	D	-BV	-BR

.....
 composed by
 RS39/02 (1Pz)
 9703 (1Pz)

Con rosone e driver, cavi dritti

With canopy and driver, straight cables


**9770** D 2700/6500K**Power** ↑25.9W ↓47.5W**Nominal lumen** ↑1218.0lm ↓1218.0lm**CRI** >90**Supply** 220-240V

Item	Temperature	Canopy	Body
9770	D	-BV	-BR

...composed by
RS38/02 (1Pz)
9700 (1Pz)

Con rosone e driver, cavi dritti

With canopy and driver, straight cables


**9771** D 2700/6500K**Power** ↑38.9W ↓73.4W**Nominal lumen** ↑1218.0lm ↓1218.0lm**CRI** >90**Supply** 220-240V

Item	Temperature	Canopy	Body
9771	D	-BV	-BR

...composed by
RS38/02 (1Pz)
9701 (1Pz)

Con rosone e driver, cavi dritti

With canopy and driver, straight cables


**9772** D 2700/6500K**Power** ↑47.5W ↓90.7W**Nominal lumen** ↑1218.0lm ↓1218.0lm**CRI** >90**Supply** 220-240V

Item	Temperature	Canopy	Body
9772	D	-BV	-BR

...composed by
RS38/02 (1Pz)
9702 (1Pz)

Con rosone e driver, cavi dritti

With canopy and driver, straight cables

**9773** D 2700/6500K**Power** ↑60.5W ↓116.6W**Nominal lumen** ↑1218.0lm ↓1218.0lm**CRI** >90**Supply** 220-240V

Item	Temperature	Canopy	Body
9773	D	-BV	-BR

...composed by
RS38/02 (1Pz)
9703 (1Pz)