



INDOOR - SUSPENSION

# MERCEDES

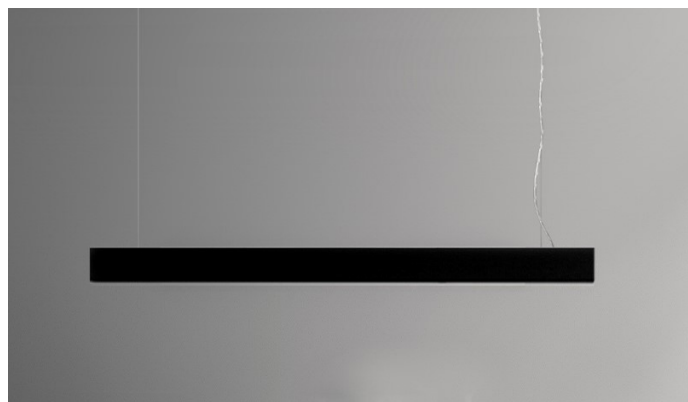


- alluminio, policarbonato  
- diffusore microprismatico

- aluminum, polycarbonate  
- microprismatic diffuser



## Solo corpo - MONOEMISSIONE

Body only - MONOEMISSIONE




	M 2700K	W 3000K	N 4000K
<b>Power</b>	27.1W	27.1W	27.1W
<b>Nominal lumen</b>	3707.6lm	3810.0lm	4014.7lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
<b>6312</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

## Solo corpo - MONOEMISSIONE

Body only - MONOEMISSIONE




	M 2700K	W 3000K	N 4000K
<b>Power</b>	36.6W	36.6W	36.6W
<b>Nominal lumen</b>	4997.2lm	5135.2lm	5411.1lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
<b>6313</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

## Solo corpo - MONOEMISSIONE

Body only - MONOEMISSIONE




	M 2700K	W 3000K	N 4000K
<b>Power</b>	46.0W	46.0W	46.0W
<b>Nominal lumen</b>	6286.8lm	6460.4lm	6807.5lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
<b>6314</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Solo corpo - MONOEMISSIONE**

Body only - MONOEMISSION




<b>6315</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	55.5W	55.5W	55.5W
<b>Nominal lumen</b>	7576.4lm	7785.6lm	8203.9lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
<b>6315</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Solo corpo - MONOEMISSIONE**

Body only - MONOEMISSION




<b>6316</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	69.6W	69.6W	69.6W
<b>Nominal lumen</b>	9510.8lm	9773.4lm	10298.5lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
<b>6316</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Rosoni per MONOEMISSIONE**

Canopy for MONOEMISSION version



Item	Finish	Power	Dimming
<b>RS08/01</b>	<b>-NE</b> ■	100W	
<b>RS10/01</b>	<b>-NE</b> ■	100W	ON-OFF   PUSH   DALI   0.1-10V
<b>RS10/03</b>	<b>-NE</b> ■	100W	ON-OFF   PUSH   CASAMBI


**Kit cavi lunghezza extra**

Kit for extended-length cables

Item	Finish	Length
<b>CK500/03</b>	<b>-NE</b> ■	5000

**Solo corpo - BIEMISSIONE**

Body only - BIEMISSIONE




<b>6322</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	↑17.7W ↓27.1W	↑17.7W ↓27.1W	↑17.7W ↓27.1W
<b>Nominal lumen</b>	↑2418.0lm ↓3707.6lm	↑2484.8lm ↓3810.0lm	↑2618.3lm ↓4014.7lm
<b>Beam angle</b>	↑diffused ↓80°	↑diffused ↓80°	↑diffused ↓80°
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc



Item	Temperature	Finish
<b>6322</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Solo corpo - BIEMISSIONE**

Body only - BIEMISSIONE




<b>6323</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	↑27.1W ↓36.6W	↑27.1W ↓36.6W	↑27.1W ↓36.6W
<b>Nominal lumen</b>	↑3707.6lm ↓4997.2lm	↑3810.0lm ↓5135.2lm	↑4014.7lm ↓5411.1lm
<b>Beam angle</b>	↑diffused ↓80°	↑diffused ↓80°	↑diffused ↓80°
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc



Item	Temperature	Finish
<b>6323</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Solo corpo - BIEMISSIONE**

Body only - BIEMISSIONE




<b>6324</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	↑36.6W ↓46.0W	↑36.6W ↓46.0W	↑36.6W ↓46.0W
<b>Nominal lumen</b>	↑4997.2lm ↓6286.8lm	↑5135.2lm ↓6460.4lm	↑5411.1lm ↓6807.5lm
<b>Beam angle</b>	↑diffused ↓80°	↑diffused ↓80°	↑diffused ↓80°
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc



Item	Temperature	Finish
<b>6324</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Solo corpo - BIEMISSIONE**

Body only - BIEMISSIONE




<b>6325</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	↑46.0W ↓55.5W	↑46.0W ↓55.5W	↑46.0W ↓55.5W
<b>Nominal lumen</b>	↑6286.8lm ↓7576.4lm	↑6460.4lm ↓7785.6lm	↑6807.5lm ↓8203.9lm
<b>Beam angle</b>	↑diffused ↓80°	↑diffused ↓80°	↑diffused ↓80°
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc



Item	Temperature	Finish
<b>6325</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Solo corpo - BIEMISSIONE**

Body only - BIEMISSIONE




<b>6326</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>	↑60.2W ↓69.6W	↑60.2W ↓69.6W	↑60.2W ↓69.6W
<b>Nominal lumen</b>	↑8221.2lm ↓9510.8lm	↑8448.2lm ↓9773.4lm	↑8902.1lm ↓10298.5lm
<b>Beam angle</b>	↑diffused ↓80°	↑diffused ↓80°	↑diffused ↓80°
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
<b>6326</b>	<b>M</b>	<b>-NG</b> ■
	<b>W</b>	
	<b>N</b>	

**Rosoni per BIEMISSIONE**

Canopy for BIEMISSIONE version



Item	Finish	Power	Dimming
<b>RS08/02</b>	<b>-NE</b> ■	200W	
<b>RS10/02</b>	<b>-NE</b> ■	200W	ON-OFF   PUSH   DALI   0.1-10V
<b>RS10/04</b>	<b>-NE</b> ■	200W	ON-OFF   PUSH   CASAMBI

**Kit cavi lunghezza extra**

Kit for extended-length cables

Item	Finish	Length
<b>CK500/03</b>	<b>-NE</b> ■	5000