



INDOOR - WALL

OTTOMANO

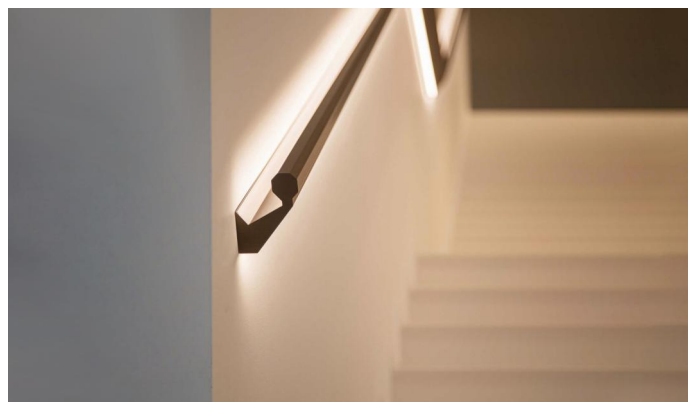


- alluminio, ferro,
policarbonato
- lunghezza max. 3m

- aluminum, iron,
polycarbonate
- max. length 3m



Profilo con Led Profile with LED

Per composizioni angolari: + 200€ per ogni angolo. Angoli consentiti: min 145°- max 155°
For corner compositions: + €200 for each corner. Permitted angles: min 145°- max 155°

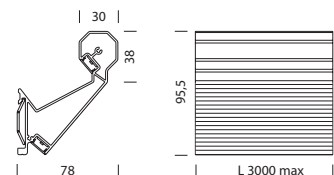


4030	M 2700K		W 3000K		N 4000K	
Power	↑9.6W	↓9.6W	↑9.6W	↓9.6W	↑9.6W	↓9.6W
Nominal lumen	↑898.0lm	↓898.0lm	↑1305.0lm	↓1305.0lm	↑960.0lm	↓960.0lm
CRI	>94		>90		>94	
Supply	24Vdc		24Vdc		24Vdc	

Item	Temperature	Finish
4030	M	-BP
	W	-BI
	N	-NE

Accessori Accessories

2 tappi chiusi + viti
2 end cups + screws



Item	Finish
4030T	-BP
	-BI
	-NE

Driver 24Vdc in tensione in remoto

Remote constant voltage drivers 24Vdc

Item	Power	IP	Dimensions	Dimming
1A1910	60W	IP20	185x63,5x22	ON-OFF
1A1476	100W	IP20	177x56,4x17,2	ON-OFF
1A0153	150W	IP20	240x60x49	ON-OFF
1A1623	250W	IP20	195x67x31	ON-OFF
1A1999	100W	IP20	201x63x30	L-C
1A0486	150W	IP20	195x67x31	L-C
1A2168	100W	IP20	190x65x22	PUSH DALI

Centraline dimmerabili in remoto

Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0.1-10V
1A0172/24	288W	IP20	57x44x25	PUSH CASAMBI

Controller 1 canale - DC
1-channel controller - DC