


INDOOR - SUSPENSION

## SHINE VERTICAL PLUMAGE





- ottone, metacrilato

- brass, methacrylate



## Con rosone e driver

With canopy and driver





	M 2700K	W 3000K	N 4000K
<b>Power</b>	5.8W	5.8W	5.8W
<b>Nominal lumen</b>	515.0lm	555.0lm	555.0lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	220-240V	220-240V	220-240V

Item	Temperature	Canopy	Body
<b>9392</b>	<b>M</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>-NO</b>	<b>-NO</b>
RS03/02 (1Pz)	<b>N</b>	<b>-OS</b>	<b>-OS</b>
9301 (1Pz)			

## Con rosone e driver

With canopy and driver




	M 2700K	W 3000K	N 4000K
<b>Power</b>	5.8W	5.8W	5.8W
<b>Nominal lumen</b>	515.0lm	555.0lm	555.0lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	220-240V	220-240V	220-240V

Item	Temperature	Canopy	Body
<b>9393</b>	<b>M</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>-NO</b>	<b>-NO</b>
RS03/03 (1Pz)	<b>N</b>	<b>-OS</b>	<b>-OS</b>
9301 (1Pz)			

## Con rosone e driver

With canopy and driver



	M 2700K	W 3000K	N 4000K
<b>Power</b>	5.8W	5.8W	5.8W
<b>Nominal lumen</b>	515.0lm	555.0lm	555.0lm
<b>CRI</b>	>90	>90	>90
<b>Supply</b>	220-240V	220-240V	220-240V


Item	Temperature	Canopy	Body
<b>9394</b>	<b>M</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>-NO</b>	<b>-NO</b>
RS03/04 (1Pz)	<b>N</b>	<b>-OS</b>	<b>-OS</b>
9301 (1Pz)			

## Con rosone, senza driver

### With canopy, without driver



Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc  
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver



	<b>9390</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>		5.8W	5.8W	5.8W
<b>Nominal lumen</b>		515.0lm	555.0lm	555.0lm
<b>CRI</b>		>90	>90	>90
<b>Supply</b>		500mA	500mA	500mA


Item	Temperature	Canopy	Body
<b>9390</b>	<b>M</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>-NO</b>	<b>-NO</b>
RS01 (1Pz)	<b>N</b>	<b>-OS</b>	<b>-OS</b>
9301 (1Pz)			

## Con rosone piatto per cartongesso, senza driver

### With flat rosette for plasterboard, without driver



Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc  
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver

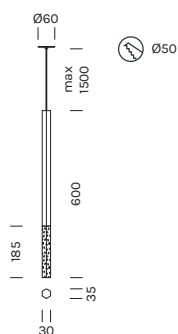

	<b>9391</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>		5.8W	5.8W	5.8W
<b>Nominal lumen</b>		515.0lm	555.0lm	555.0lm
<b>CRI</b>		>90	>90	>90
<b>Supply</b>		500mA	500mA	500mA


Item	Temperature	Canopy	Body
<b>9391</b>	<b>M</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>-NO</b>	<b>-NO</b>
RS06 (1Pz)	<b>N</b>	<b>-OS</b>	<b>-OS</b>
9301 (1Pz)			

## Solo corpo

### Body only



Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc  
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver



	<b>9301</b>	<b>M 2700K</b>	<b>W 3000K</b>	<b>N 4000K</b>
<b>Power</b>		5.8W	5.8W	5.8W
<b>Nominal lumen</b>		515.0lm	555.0lm	555.0lm
<b>CRI</b>		>90	>90	>90
<b>Supply</b>		500mA	500mA	500mA

Item	Temperature	Finish
<b>9301</b>	<b>M</b>	<b>-BV</b>
	<b>W</b>	<b>-NO</b>
	<b>N</b>	<b>-OS</b>

**Driver in corrente in remoto 500mA**

500mA remote constant current driver


Item	items powerable	Power	IP	Dimensions	Dimming
<b>1A2399</b>	1	10W	IP20	102x38x21	L-C

**Convertitore da 24Vdc a 500mA**

24Vdc to 500 mA converter

Necessita di driver remoto a 24Vdc

Requires 24V remote driver



Item	items powerable
<b>2A4843</b>	1

**Driver 24Vdc in tensione in remoto**

Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
<b>1A0150</b>	1-2	30W	IP20	154x50x14	ON-OFF
<b>1A1910</b>	1-4	60W	IP20	185x63,5x22	ON-OFF
<b>1A1476</b>	1-7	100W	IP20	177x56,4x17,2	ON-OFF
<b>1A2168</b>	1-7	100W	IP20	190x65x22	PUSH   DALI
<b>1A1999</b>	1-7	100W	IP20	201x63x30	L-C


**Centraline dimmerabili in remoto**

Remote dimmable controllers

Item	Power	IP	Dimensions	Dimming
<b>1A0837/24</b>	144W	IP20	132x22x20	PUSH   DALI   1-10V
<b>1A0838/24</b>	288W	IP20	164x38x25	PUSH   DALI   0.1-10V

**Jack per track 48V + Connettore nero**


Jack for track 48V + black connector

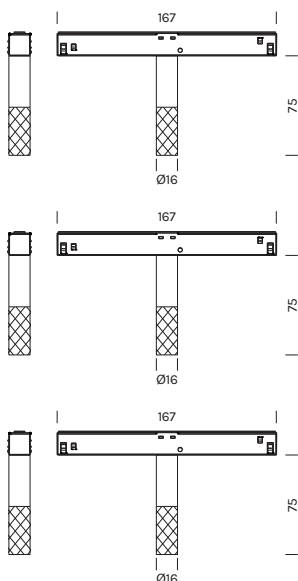

Item	Finish	Dimming
<b>201/01</b>	-JBI -JNE	ON-OFF
<b>201/02</b>	-JBI -JNE	0-10V
<b>201/03</b>	-JBI -JNE	DALI


**Jack per track 230V + Connettore nero**

Jack for track 230V + black connector

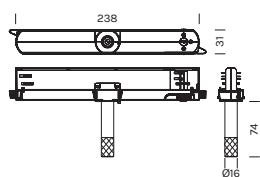


Item	Finish	Dimming
------	--------	---------


211/02	-JBI	ON-OFF
	-JNE	



211/05	-JBI	L-C
	-JNE	

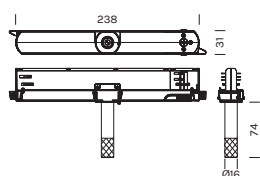



211/06	-JBI	DALI
	-JNE	

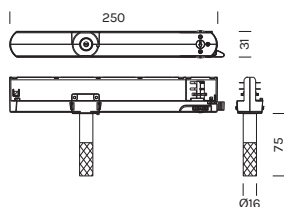

211/09	-JBI	CASAMBI
	-JNE	

**Passacavi**

Cable entry



Item	Finish
------	--------

BEAMKIT01	-NA
-----------	-----

BEAMKIT02	-NA
-----------	-----