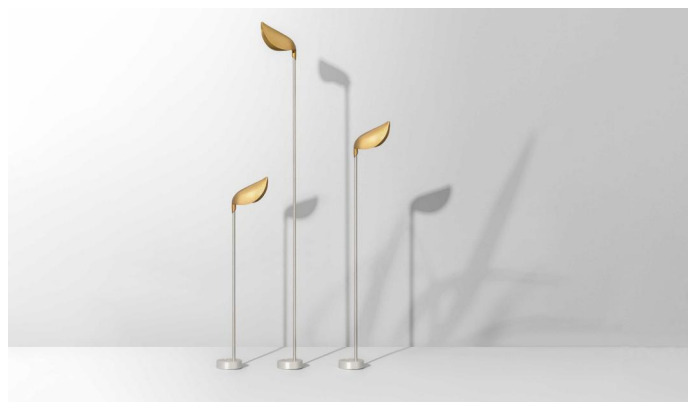



OUTDOOR - FLOOR

ZOELLA






- alluminio, acciaio inox 304

- aluminum, stainless steel 304






	M 2700K	W 3000K	N 4000K
Power	4.6W	4.6W	4.6W
Nominal lumen	357.0lm	435.0lm	457.0lm
CRI	85	85	85
Supply	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
7914	M	-BA 
	W	-BP 
	N	






	M 2700K	W 3000K	N 4000K
Power	4.6W	4.6W	4.6W
Nominal lumen	357.0lm	435.0lm	457.0lm
CRI	85	85	85
Supply	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
7915	M	-BA 
	W	-BP 
	N	



	M 2700K	W 3000K	N 4000K
Power	4.6W	4.6W	4.6W
Nominal lumen	357.0lm	435.0lm	457.0lm
CRI	85	85	85
Supply	24Vdc	24Vdc	24Vdc

Item	Temperature	Finish
7916	M	-BA 
	W	-BP 
	N	



Driver 24Vdc in tensione in remoto

Remote constant voltage drivers 24Vdc

Item	items powerable	Power	IP	Dimensions	Dimming
1A0143	1	14W	IP67	85x39x19	ON-OFF
1A3004	1-2	40W	IP67	148x40x30	ON-OFF
1A3005	1-6	100W	IP67	190x52x33	ON-OFF
1A2386	1-12	120W	IP67	191x63x37,5	DALI
1A2387	1-20	200W	IP67	195x68x39,5	DALI PUSH