

INDOOR



SOSPENSIONE / SUSPENSION

## SHINE VERTICAL



- alluminio, ottone
- colore cavo: nero
- con cavo 5m: + 53€

- aluminum, brass
- cable color: black
- with 5-meters cable: + 53€

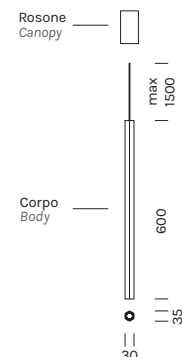


## Con rosone e driver / With canopy and driver

	<b>M</b> 2700K	<b>W</b> 3000K	<b>N</b> 4000K
<b>Potenza/ Power</b>	1x5.8W	1x5.8W	1x5.8W
<b>Nominal lumen</b>	1x515lm	1x555lm	1x555lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	220-240V	220-240V	220-240V



Articolo Item	Temperatura Temperature	°Ottica °Optic	Rosone Canopy	Corpo Body
<b>9397</b>	<b>M</b>	<b>15</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>36</b>	<b>-NO</b>	<b>-NO</b>
RS03/02 (1Pz)	<b>N</b>		<b>-OS</b>	<b>-OS</b>
9300 (1Pz)				




## Con rosone e driver / With canopy and driver

	<b>M</b> 2700K	<b>W</b> 3000K	<b>N</b> 4000K
<b>Potenza/ Power</b>	1x5.8W	1x5.8W	1x5.8W
<b>Nominal lumen</b>	1x515lm	1x555lm	1x555lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	220-240V	220-240V	220-240V




Articolo Item	Temperatura Temperature	°Ottica °Optic	Rosone Canopy	Corpo Body
<b>9398</b>	<b>M</b>	<b>15</b>	<b>-BV</b>	<b>-BV</b>
composed by	<b>W</b>	<b>36</b>	<b>-NO</b>	<b>-NO</b>
RS03/03 (1Pz)	<b>N</b>		<b>-OS</b>	<b>-OS</b>
9300 (1Pz)				



### Con rosone e driver / With canopy and driver

	<b>M</b> 2700K	<b>W</b> 3000K	<b>N</b> 4000K
<b>Potenza/ Power</b>	1x5.8W	1x5.8W	1x5.8W
<b>Nominal lumen</b>	1x515lm	1x555lm	1x555lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	220-240V	220-240V	220-240V




Articolo Item	Temperatura Temperature	°Ottica °Optic	Rosone Canopy	Corpo Body
<b>9399</b>	<b>M</b>	<b>15</b>	<b>-BV</b>	<b>-BV</b>
..... composed by	<b>W</b>	<b>36</b>	<b>-NO</b>	<b>-NO</b>
RS03/04 (1Pz)	<b>N</b>		<b>-OS</b>	<b>-OS</b>
9300 (1Pz)				

### Con rosone, senza driver / With canopy, without driver



	<b>M</b> 2700K	<b>W</b> 3000K	<b>N</b> 4000K
<b>Potenza/ Power</b>	1x5.8W	1x5.8W	1x5.8W
<b>Nominal lumen</b>	1x515lm	1x555lm	1x555lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	500mA	500mA	500mA




Articolo Item	Temperatura Temperature	°Ottica °Optic	Rosone Canopy	Corpo Body
<b>9395</b>	<b>M</b>	<b>15</b>	<b>-BV</b>	<b>-BV</b>
..... composed by	<b>W</b>	<b>36</b>	<b>-NO</b>	<b>-NO</b>
RS01 (1Pz)	<b>N</b>		<b>-OS</b>	<b>-OS</b>
9300 (1Pz)				

### Con rosone per incasso, senza driver / With canopy for built-in application, without driver



	<b>M</b> 2700K	<b>W</b> 3000K	<b>N</b> 4000K
<b>Potenza/ Power</b>	1x5.8W	1x5.8W	1x5.8W
<b>Nominal lumen</b>	1x515lm	1x555lm	1x555lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	500mA	500mA	500mA

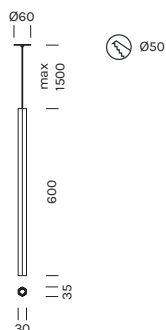





Articolo Item	Temperatura Temperature	°Ottica °Optic	Rosone Canopy	Corpo Body
<b>9396</b>	<b>M</b>	<b>15</b>	<b>-BV</b>	<b>-BV</b>
..... composed by	<b>W</b>	<b>36</b>	<b>-NO</b>	<b>-NO</b>
RS06 (1Pz)	<b>N</b>		<b>-OS</b>	<b>-OS</b>
9300 (1Pz)				



## Solo corpo / Body only

9300	M 2700K	W 3000K	N 4000K
Potenza/ Power	1x5.8W	1x5.8W	1x5.8W
Nominal lumen	1x515lm	1x555lm	1x555lm
CRI	>90	>90	>90
Alimentazione/ Supply	500mA	500mA	500mA




Articolo Item	Temperatura Temperature	°Optica °Optic	Corpo Body
<b>9300</b>	<b>M</b>	<b>15</b>	<b>-BV</b> 
	<b>W</b>	<b>36</b>	<b>-NO</b> 
	<b>N</b>		<b>-OS</b> 

Necessita di driver remoto a 500mA oppure di convertitore da 24Vdc a 500mA più driver a 24Vdc  
Requires 500mA remote driver, or 24Vdc to 500 mA converter and 24Vdc driver

## Driver in corrente in remoto / Remote constant current drivers

Articolo Item	art. alimentabili items powerable	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming
<b>1A2399</b>	1	10W	IP20	102x38x21	L-C

## Convertitore da 24Vdc a 500mA / 24Vdc to 500 mA converter



Articolo Item	art. alimentabili items powerable
<b>2A4843</b>	1

Necessita di driver remoto a 24Vdc  
Requires 24V remote driver








## Driver 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	art. alimentabili items powerable	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming
<b>1A0530</b>	1	8W	IP20	42x40x22	ON-OFF
<b>1A0150</b>	1-2	30W	IP20	154x50x14	ON-OFF
<b>1A1910</b>	1-4	60W	IP20	185x63,5x22	ON-OFF
<b>1A1476</b>	1-7	100W	IP20	177x56,4x17,2	ON-OFF
<b>1A2168</b>	1-7	100W	IP20	190x65x22	PUSH   DALI
<b>1A1999</b>	1-7	100W	IP20	201x63x30	L-C










## Centraline dimmerabili in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming	
<b>1A0837/24</b>	144W	IP20	132x22x20	PUSH   DALI   1-10V	
<b>1A0838/24</b>	288W	IP20	164x38x25	PUSH   DALI   0-10V   1-10V	
Controller 1 canale - DC 1-channel controller - DC	<b>1A0172/24</b>	288W	IP20	57x44x25	PUSH   CASAMBI


**Jack per track 48V + Connettore nero / Jack for track 48V + black connector**

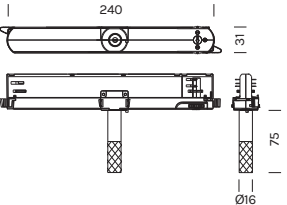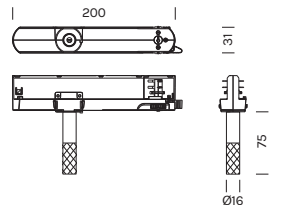	<b>Articolo</b> <b>Item</b>	<b>Finitura</b> <b>Finish</b>	<b>Dimmerazione</b> <b>Dimming</b> <b>ON-OFF</b>
	<b>201/01</b>	<b>-JBI</b>  <b>-JNE</b> 	
	<b>201/02</b>	<b>-JBI</b>  <b>-JNE</b> 	0-10V
	<b>201/03</b>	<b>-JBI</b>  <b>-JNE</b> 	DALI

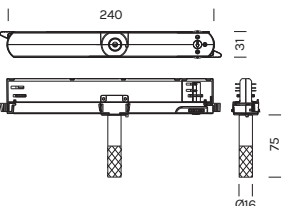**Jack per track 230V + Connettore nero / Jack for track 230V + black connector**

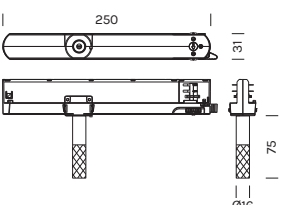	<b>Articolo</b> <b>Item</b>	<b>Finitura</b> <b>Finish</b>	<b>Dimmerazione</b> <b>Dimming</b> <b>ON-OFF</b>
	<b>211/02</b>	<b>-JBI</b>  <b>-JNE</b> 	
	<b>211/05</b>	<b>-JBI</b>  <b>-JNE</b> 	L-C
	<b>211/06</b>	<b>-JBI</b>  <b>-JNE</b> 	DALI
	<b>211/09</b>	<b>-JBI</b>  <b>-JNE</b> 	CASAMBI

## Passacavi / Cable entry




Articolo

Finitura

Item

Finish

**BEAMKIT01****-NA** ■**BEAMKIT02****-NA** ■