

BEAM MASTER TRACK

Design Marc Sadler

Registered Design



Beam Master è una serie di faretti spot a LED orientabili, disponibili in diverse misure, potenze e finiture di superficie. Il fascio di luce consente un'illuminazione d'accento, per aggiungere stile e drammaticità a un particolare dell'arredamento o dovunque sia necessaria luce focalizzata. La ghiera è disponibile in un'ampia gamma di colori.

Beam Master is a series of adjustable LED spotlights, available in different sizes, wattages and surface finishes. The light beam allows accent lighting, to add style and drama to a piece of furniture or wherever focused light is needed. The ring is available in a wide range of colours.



BEAM MASTER TRACK 35



BEAM MASTER TRACK 60




BEAM MASTER TRACK 80



BEAM MASTER TRACK 35


48Vdc | CRI: 97

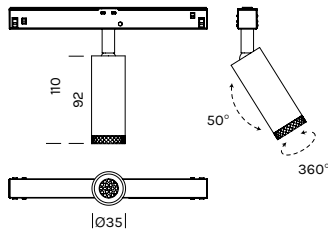

Monocolore (ghiera inclusa) - Single color (ring included)

articolo item	temperatura colore colour temperature	°ottica °optic	finitura finish	potenza power	lumen lumens
4326	M 2700 °K	15 36	BI NE OR RR BV TI	5,4W	534 lm
	W 3000 °K				557 lm
	N 4000 °K				627 lm

Personalizzato - Customized

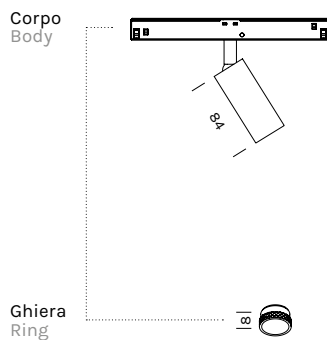


articolo item	temperatura colore colour temperature	°ottica °optic	finitura finish	potenza power	lumen lumens
4321	M 2700 °K	15 36	BI NE OR RR BV TI	5,4W	534 lm
	W 3000 °K				557 lm
	N 4000 °K				627 lm
411			BI NE OR RR BV TI		

Alimentatori 48Vdc in tensione - Constant voltage drivers 48Vdc

articolo item	potenza power	dimensioni dimension	n° articoli alimentabili n° of items powerable
ELG7548	75W	180x63x35,5	1-12
ELG15048	150W	219x63x36	1-25

BEAM MASTER TRACK 60


48Vdc | CRI: 97

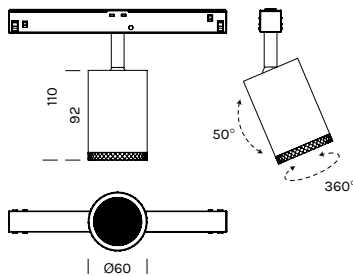

Monocolore (ghiera inclusa) - Single color (ring included)

articolo item	temperatura colore colour temperature	°ottica °optic	finitura finish	potenza power	lumen lumens
4327	M 2700 °K	12	BI NE OR RR BV TI	8,5W	1034 lm
	W 3000 °K	35			1076 lm
	N 4000 °K	55			1104 lm

Personalizzato - Customized

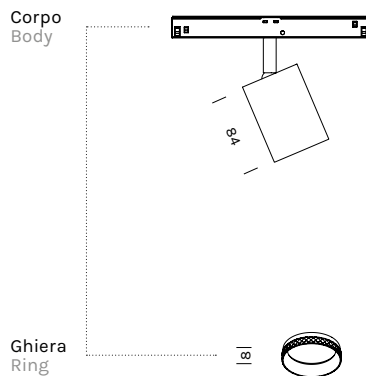

articolo item	temperatura colore colour temperature	°ottica °optic	finitura finish	potenza power	lumen lumens
4322	M 2700 °K	12	BI NE OR RR BV TI	8,5W	1034 lm
	W 3000 °K	35			1076 lm
	N 4000 °K	55			1104 lm
412			BI NE OR RR BV TI		


Alimentatori 48Vdc in tensione - Constant voltage drivers 48Vdc

articolo item	potenza power	dimensioni dimension	n° articoli alimentabili n° of items powerable
ELG7548	75W	180x63x35,5	1-8
ELG15048	150W	219x63x36	1-17

BEAM MASTER TRACK 80


48Vdc | CRI: 97

Monocolore (ghiera inclusa) - Single color (ring included)

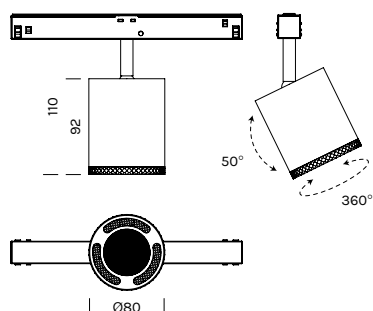

articolo item	temperatura colore colour temperature	°ottica °optic	finitura finish	potenza power	lumen lumens
4328	M 2700 °K	12	BI NE OR RR BV TI	12,3W	1413 lm
	W 3000 °K	35			1470 lm
	N 4000 °K	55			1507 lm

Personalizzato - Customized

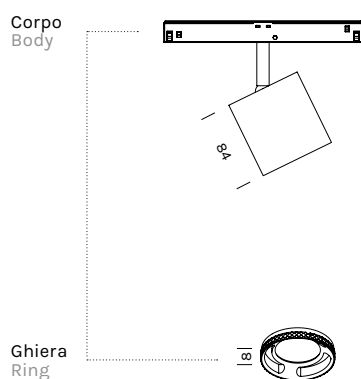

articolo item	temperatura colore colour temperature	°ottica °optic	finitura finish	potenza power	lumen lumens
4323	M 2700 °K	12	BI NE OR RR BV TI	12,3W	1413 lm
	W 3000 °K	35			1470 lm
	N 4000 °K	55			1507 lm
413			BI NE OR RR BV TI		

Alimentatori 48Vdc in tensione - Constant voltage drivers 48Vdc

articolo item	potenza power	dimensioni dimension	n° articoli alimentabili n° of items powerable
ELG7548	75W	180x63x35,5	1-6
ELG15048	150W	219x63x36	1-12