


BEAM MASTER Ø80




Alluminio
Fascio di luce orientabile
Driver: escluso

Aluminum
 Light beam: adjustable
 Driver: excluded

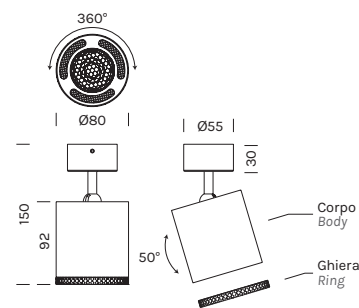

Corpo (ghiera esclusa) / Body (ring excluded)


4313	M 2700°K	W 3000°K	N 4000°K
Potenza/ Power	1x 12,3W	1x 12,3W	1x 12,3W
Lumen	1x 1413 lm	1x 1470 lm	1x 1507 lm
CRI	97	97	97
Alimentazione/ Supply	24Vdc	24Vdc	24Vdc



Articolo Item	Temperatura Temperature	°Ottica °Optic	Finitura Finish
4313	M	12	-BO
	W	35	-NO
	N	55	-BV
			-OR
			-RR
			-TI

Ghiera / Ring

Filtro anti-abbagliamento incluso
 Antiglare filter included



Articolo Item	Finitura Finish
413	-BO
	-BV
	-NO
	-OR
	-RR
	-TI

Alimentatori 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	Potenza Power	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
1A0150	30W	160x58x18	1
1A0151	50W	160x58x18	1-2
1A0152	75W	160x58x18	1-3
1A0145	100W	190x52x37	1-4
1A0153	150W	240x60x49	1-6

Centraline dimmerabili in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	Dimensioni Dimensions
1A0837	120W MAX	132x22x19
1A0838	240W MAX	156x47x26
1A0172	240W MAX	57x43x19