




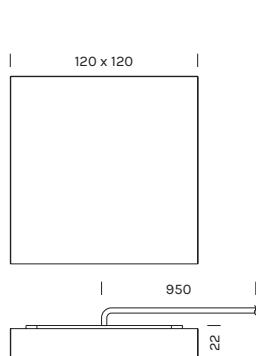

**MARKIL**

**Alluminio**  
**Fascio di luce verso il basso**  
**Driver: escluso**

Aluminum  
 Light beam: downward-projected  
 Driver: excluded

<b>7250</b>	<b>M 2700°K</b>	<b>W 3000°K</b>	<b>N 4000°K</b>
<b>Potenza/ Power</b>	1x 2W	1x 2W	1x 2W
<b>Lumen</b>	1x 265 lm	1x 278 lm	1x 285 lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	24Vdc	24Vdc	24Vdc



Articolo Item	Temperatura Temperature	Finitura Finish
<b>7250</b>	<b>M</b>	<b>-AA</b> 
	<b>W</b>	<b>-BA</b> 
	<b>N</b>	<b>-BI</b> 
		<b>-RU</b> 

**Alimentatori 24Vdc in tensione in remoto per uso interno / Remote constant voltage drivers 24Vdc for indoor use**

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
<b>1A0150</b>	30W	-	160x58x18	1-3

**Alimentatori 24Vdc in tensione in remoto per uso esterno / Remote constant voltage drivers 24Vdc for outdoor use**

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
<b>1A0148</b>	30W	67	175x42x34	1-5