








# OTTOMANO

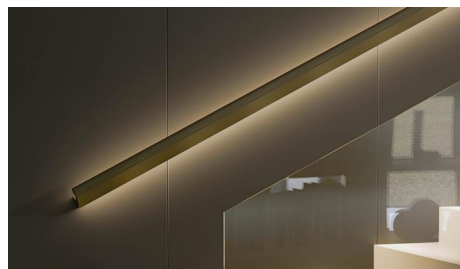


**Alluminio**  
**Fascio di luce: diffuso indiretto**  
**Driver: escluso**

Aluminum  
 Light beam: diffused  
 Driver: excluded

4030	M 2700°K	W 3000°K	N 4000°K
<b>Potenza/ Power</b>	2x 9,6W/mt	2x 9,6W/mt	2x 9,6W/mt
<b>Lumen</b>	2x 800 lm/mt	2x 800 lm/mt	2x 800 lm/mt
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	24Vdc	24Vdc	24Vdc

Articolo Item	Temperatura Temperature	IP	Finitura Finish
4030	M	20	-BR 
	W		-BI 
	N		-NE 
4030	M	54	-BR 
	W		-BI 
	N		-NE 

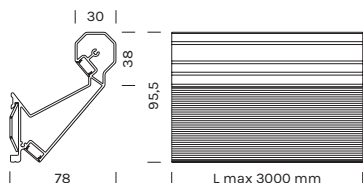

## Alimentatori 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	Potenza Power	IP	Dimensioni Dimensions
1A0150	30W	-	160x58x18
1A0151	50W	-	160x58x18
1A0152	75W	-	160x58x18
1A0145	100W	-	190x52x37
1A0153	150W	-	240x60x49

## Alimentatori 24Vdc in tensione in remoto per uso esterno / Remote constant voltage drivers 24Vdc for outdoor use

Articolo Item	Potenza Power	IP	Dimensioni Dimensions
1A0148	30W	67	175x42x34
1A0149	75W	67	200x50x32
1A0147	240W	67	244x68x39




## Centraline dimmerabili in remoto / Remote dimmable controllers

---

Articolo Item	Potenza Power	Dimensioni Dimensions
<b>1A0837</b>	120W MAX	132x22x19
<b>1A0838</b>	240W MAX	156x47x26
<b>1A0172</b>	240W MAX	57x43x19

## Accessori / Accessories

---

	Articolo Item	Finitura Finish
2 tappi chiusi + viti N° 2 end cups + screws	<b>4030-T</b>	<b>-BR</b>  <b>-BI</b>  <b>-NE</b> 
Giunto lineare Straight joint	<b>4030-G</b>	