


SOFFITTO INCASSO / CEILING BUILT-IT

TINY ADJUSTABLE GHOST 24V




Alluminio
Fascio di luce verso il basso
Driver: escluso

Aluminum
 Light beam: downward-projected
 Driver: excluded

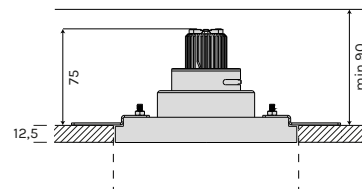


	M 2700°K	W 3000°K	N 4000°K
Potenza/ Power	1x 5,4W	1x 5,4W	1x 5,4W
Lumen	1x 534 lm	1x 557 lm	1x 627 lm
CRI	97	97	97
Alimentazione/ Supply	150mA	150mA	150mA

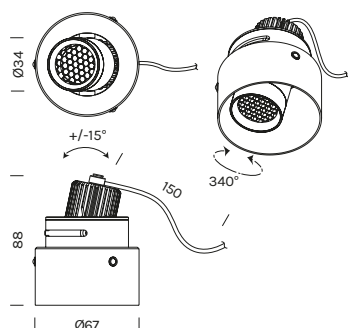

Articolo Item	Temperatura Temperature	°Ottica °Optic	Finitura Finish
4827	M	10	-BO
	W	30	-BV
	N		-NA
			-OR

Controcassa / Outercasing

Articolo Item	Finitura Finish
CN19	-NA



Alimentatori in tensione in remoto / Remote constant voltage drivers

Articolo Item	Potenza Power	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
1A0151	50W	160x58x18	1-5

Centraline dimmerabili in tensione in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	Dimensioni Dimensions
1A0837	120W MAX	132x22x19