

INDOOR


SOSPENSIONE / SUSPENSION

EXAGON BIOLIGHT



- alluminio, policarbonato


- aluminum, polycarbonate

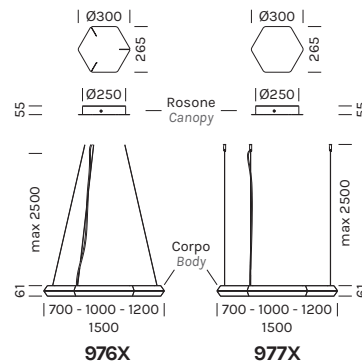

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9760	D 2700/6500K
Potenza/ Power	1x25.9W, 1x47.5W
Nominal lumen	1x2192lm, 1x4019lm
CRI	>90
Alimentazione/ Supply	220-240V




Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9760	D	-BV	-BR
composed by RS39/02 (1Pz) 9700 (1Pz)			

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9761	D 2700/6500K
Potenza/ Power	1x38.9W, 1x73.4W
Nominal lumen	1x3289lm, 1x6212lm
CRI	>90
Alimentazione/ Supply	220-240V

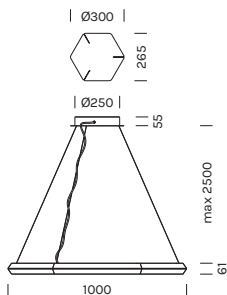


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9761	D	-BV	-BR
composed by RS39/02 (1Pz) 9701 (1Pz)			

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9762	D 2700/6500K
Potenza/ Power	1x47.5W, 1x90.7W
Nominal lumen	1x4019lm, 1x7673lm
CRI	>90
Alimentazione/ Supply	220-240V




Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9762	D	-BV	-BR
..... composed by			
RS39/02 (1Pz)			
9702 (1Pz)			

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9763	D 2700/6500K
Potenza/ Power	1x60.5W, 1x116.6W
Nominal lumen	1x5116lm, 1x9866lm
CRI	>90
Alimentazione/ Supply	220-240V




Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9763	D	-BV	-BR
..... composed by			
RS39/02 (1Pz)			
9703 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9770	D 2700/6500K
Potenza/ Power	1x25.9W, 1x47.5W
Nominal lumen	1x2192lm, 1x4019lm
CRI	>90
Alimentazione/ Supply	220-240V




Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9770	D	-BV	-BR
..... composed by			
RS38/02 (1Pz)			
9700 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9771	D 2700/6500K
Potenza/ Power	1x38.9W, 1x73.4W
Nominal lumen	1x3289lm, 1x6212lm
CRI	>90
Alimentazione/ Supply	220-240V

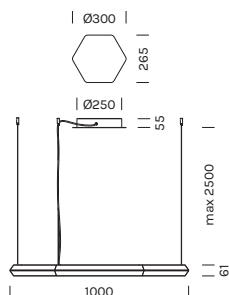


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9771	D	-BV	-BR
..... composed by			
RS38/02 (1Pz)			
9701 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9772	D 2700/6500K
Potenza/ Power	1x47.5W, 1x90.7W
Nominal lumen	1x4019lm, 1x7673lm
CRI	>90
Alimentazione/ Supply	220-240V

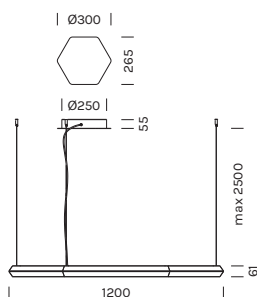


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9772	D	-BV	-BR
..... composed by			
RS38/02 (1Pz)			
9702 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9773	D 2700/6500K
Potenza/ Power	1x60.5W, 1x116.6W
Nominal lumen	1x5116lm, 1x9866lm
CRI	>90
Alimentazione/ Supply	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9773	D	-BV	-BR
..... composed by			
RS38/02 (1Pz)			
9703 (1Pz)			