



TERRA INCASSO / FLOOR BUILT-IN

# MAXI DOT UP LIGHT Ø100

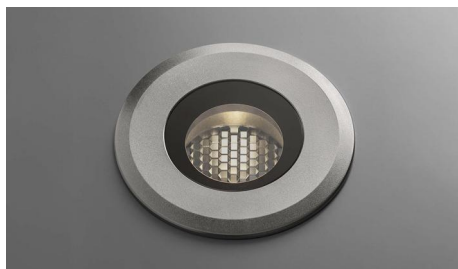


**Alluminio, acciaio inox 316 e vetro**  
**Fascio di luce verso l'alto**  
**Driver: escluso**




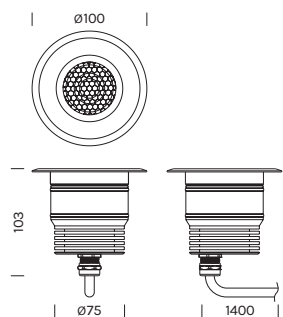
Aluminum, stainless steel 316 and glass  
 Light beam: upward-projected  
 Driver: excluded



115	M 2700°K	W 3000°K	N 4000°K	RGBW RGB+3000°K
<b>Potenza/ Power</b>	1x 9,1W	1x 9,1W	1x 9,1W	1x 7,9W
<b>Lumen</b>	1x 1119 lm	1x 1166 lm	1x 1189 lm	1x 465lm
<b>CRI</b>	>90	>90	>90	>90
<b>Alimentazione/ Supply</b>	24Vdc	24Vdc	24Vdc	24Vdc

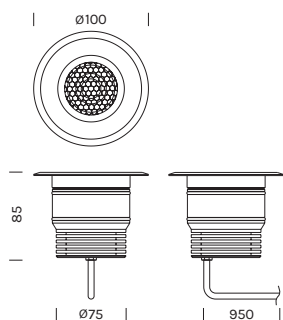

Articolo Item	Temperatura Temperature	°Optica °Optic	Finitura Finish
<b>115</b>	<b>M</b>	<b>00</b>	<b>-AI</b> 
	<b>W</b>	<b>12</b>	
	<b>N</b>	<b>35</b>	
		<b>55</b>	




<b>115</b>	<b>RGBW</b>	<b>24</b>	<b>-AI</b> 
		<b>36</b>	
		<b>60</b>	

**La versione RGBW necessita dell'Alimentatore in 24Vdc in tensione + la Centralina RGBW.**  
**RGBW version requires constant voltage driver 24Vdc + driver RGBW**

## Controcassa / Outercasing

Controcassa Inox  
Stainless steel outercasing

Articolo	IP
Item	IP
<b>CN10</b>	IP67



## Alimentatori 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo	Potenza	IP	Dimensioni	N° art. alimentabili
Item	Power	IP	Dimensions	N° of items powerable
<b>1A0143</b>	14W	IP67	90x39x19	1
<b>1A0148</b>	30W	IP67	175x42x34	1-2
<b>1A0149</b>	75W	IP67	200x50x32	1-4
<b>1A0147</b>	240W	IP67	244x68x39	1-18

## Controller per versione RGBW / Controller for RGBW version

Articolo	Potenza	IP	Dimensioni	N° art. alimentabili
Item	Power	IP	Dimensions	N° of items powerable
<b>2A4314</b>	67W MAX	IP67	90x71x58	1-7
<b>2A4315</b>	67W MAX	IP67	90x71x58	1-7