


BINARIO 48V / TRACK 48V

# BEAM MASTER TRACK 48V Ø60 ZUMMY




**Alluminio**  
**Fascio di luce orientabile**  
**Driver: escluso**

Aluminum  
 Light beam: adjustable  
 Driver: excluded

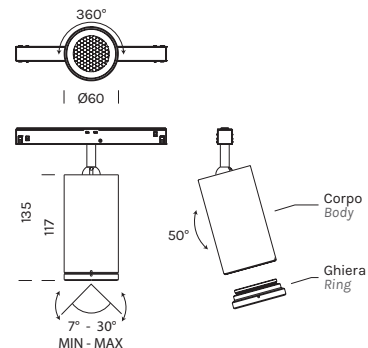

## Corpo per binario PLAFONE (ghiera esclusa) / Body for CEILING track (ring excluded)

4324	M 2700°K	W 3000°K	N 4000°K
<b>Potenza/ Power</b>	1x 8,5W	1x 8,5W	1x 8,5W
<b>Lumen</b>	1x 1034 lm	1x 1076 lm	1x 1104 lm
<b>CRI</b>	97	97	97
<b>Alimentazione/ Supply</b>	48Vdc	48Vdc	48Vdc




Articolo Item	Temperatura Temperature	Colore jack Jack color	Finitura Finish
<b>4324</b>	<b>M</b> <b>W</b> <b>N</b>	<b>-JBI</b>	<b>-BO</b>
		<b>-JNE</b>	<b>-NO</b>
			<b>-BV</b>
			<b>-OR</b>
			<b>-RR</b>
			<b>-TI</b>

code **4324/01**  
for DALI2 version.

## Corpo per binario INCASSO (ghiera esclusa) / Body for BUILT-IN track (ring excluded)

4924	M 2700°K	W 3000°K	N 4000°K
<b>Potenza/ Power</b>	1x 8,5W	1x 8,5W	1x 8,5W
<b>Lumen</b>	1x 1034 lm	1x 1076 lm	1x 1104 lm
<b>CRI</b>	97	97	97
<b>Alimentazione/ Supply</b>	48Vdc	48Vdc	48Vdc



Articolo Item	Temperatura Temperature	Colore jack Jack color	Finitura Finish
<b>4924</b>	<b>M</b> <b>W</b> <b>N</b>	<b>-JBI</b>	<b>-BO</b>
		<b>-JNE</b>	<b>-NO</b>
			<b>-BV</b>
			<b>-OR</b>
			<b>-RR</b>
			<b>-TI</b>

code **4924/01**  
for DALI2 version.

## Ghiera / Ring

Filtro anti-abbagliamento incluso  
Antiglare filter included



Articolo Item	Finitura Finish
<b>414</b>	-BO 
	-BV 
	-NO 
	-OR 
	-RR 
	-TI 

## Alimentatori 48Vdc in tensione / Constant voltage drivers 48Vdc

Articolo Item	Potenza Power	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
<b>1A0633</b>	70W	225x60x36	1-4
<b>1A0634</b>	150W	225x60x36	1-9