


BEAM MASTER Ø80




Alluminio
Fascio di luce orientabile
Driver: escluso

Aluminum
 Light beam: adjustable
 Driver: excluded

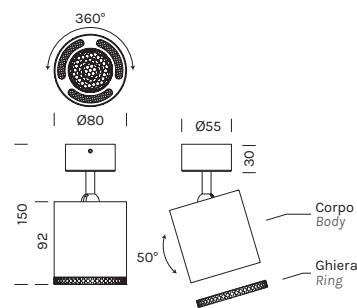

Corpo (ghiera esclusa) / Body (ring excluded)


4303	M 2700K	W 3000K	N 4000K
Potenza/ Power	1x 12,2W	1x 12,2W	1x 12,2W
Lumen	1x 1416 lm	1x 1476 lm	1x 1525 lm
CRI	>90	>90	>90
Alimentazione/ Supply	24Vdc	24Vdc	24Vdc



Articolo Item	Temperatura Temperature	°Ottica °Optic	Finitura Finish
4303	M	12	-BO
	W	35	-BV
	N	55	-NO
			-OR
			-RR
			-TI

Ghiera / Ring

Filtro anti-abbagliamento incluso
 Antiglare filter included



Articolo Item	Finitura Finish
413	-BO
	-BV
	-NO
	-OR
	-RR
	-TI

Alimentatori 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	N° art. alimentabili N° of items powerable	Dimmer
1A0150	30W MAX	IP20	160x58x18	1	-
1A0151	50W MAX	IP20	160x58x18	1-2	-
1A0152	75W MAX	IP20	160x58x18	1-3	-
1A0145	100W MAX	IP67	190x52x33	1-4	-
1A0153	150W MAX	IP20	240x60x49	1-6	-

Centraline dimmerabili in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	Dimmer
1A0837	144W MAX	IP20	132x22x19	1-10V DALI PUSH
1A0838	288W MAX	IP20	150x38x25	0-10V 1-10V DALI PUSH
1A0172	240W MAX	IP20	57x43x19	CASAMBI PUSH

Controller 1 canale - DC

Controller 1 channel - DC