


SOFFITTO INCASSO / CEILING BUILT-IN

# TINY ADJUSTABLE GHOST 24V




**Alluminio**  
**Fascio di luce verso il basso**  
**Driver: escluso**

Aluminum  
 Light beam: downward-projected  
 Driver: excluded

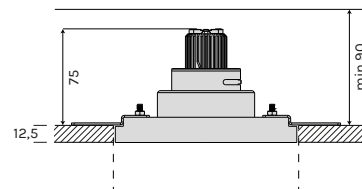

4846	M 2700K	W 3000K	N 4000K
<b>Potenza/ Power</b>	1x 6,2W	1x 6,2W	1x 6,2W
<b>Lumen</b>	1x 700 lm	1x 731 lm	1x 782 lm
<b>CRI</b>	>90	>90	>90
<b>Alimentazione/ Supply</b>	24Vdc	24Vdc	24Vdc

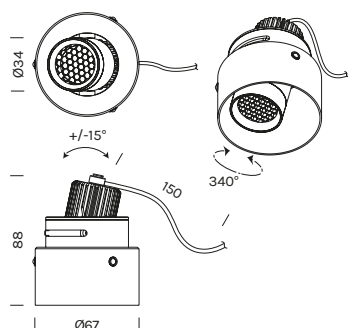


Articolo Item	Temperatura Temperature	°Ottica °Optic	Finitura Finish
<b>4846</b>	<b>M</b>	<b>10</b>	<b>-BO</b>
	<b>W</b>	<b>30</b>	<b>-BV</b>
	<b>N</b>		<b>-NA</b>
			<b>-OR</b>

## Controcassa / Outercasing


Controcassa in gesso singola  
 Single plaster outercasing

Articolo Item
<b>CN19</b>



Controcassa in gesso doppia  
Double plaster outercasing

**CN21**

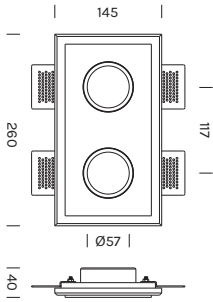

### Alimentatori in tensione in remoto / Remote constant voltage drivers

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	N° art. alimentabili N° of items powerable	Dimmer
<b>1A0151</b>	50W MAX	IP20	160x58x18	1-4	-

### Centraline dimmerabili in tensione in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	Dimmer
<b>1A0837</b>	144W MAX	IP20	132x22x19	1-10V   DALI   PUSH