




SOSPENSIONE / SUSPENSION

GAVIN



ferro, metacrilato
fascio di luce verso il basso


iron, methacrylate
downward beam of light

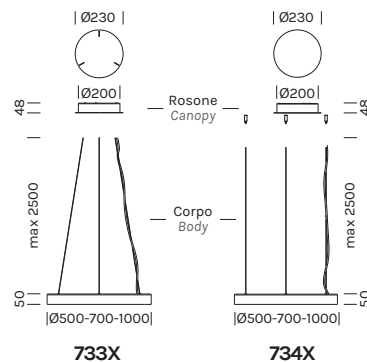

Cavi base tonda / Cables to round canopy



7330	W 3000
Potenza/ Power	1x29.3W
Lumen	1x3089lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

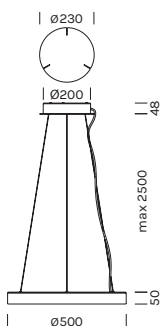


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7330	W	-BI	-BI
RS61 (1Pz)		-NE	-NE
7300 (1Pz)		-BV	-BV
		-OR	-OR
		-TI	-TI

Cavi base tonda / Cables to round canopy



7331	W 3000
Potenza/ Power	1x42.6W
Lumen	1x4493lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

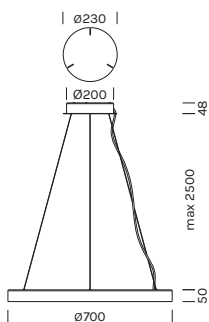

Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7331	W	-BI	-BI
RS61 (1Pz)		-NE	-NE
7301 (1Pz)		-BV	-BV
		-OR	-OR
		-TI	-TI


Il codice prodotto si compone mettendo uno dopo l'altro, da sinistra a destra, i dati nelle colonne gialle, es: 1111M12-AA
The product code is created by putting in sequence the data under the yellow columns from left to right, e.g:1111M12-AA

PRELIMINARY



Cavi base tonda / Cables to round canopy

7332	W 3000
Potenza/ Power	1x63.0W
Lumen	1x6646lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

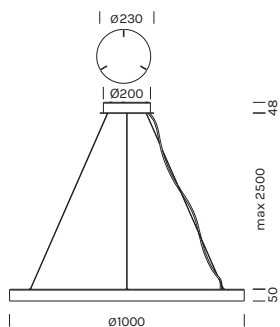


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7332	W	-BI	-BI
RS61 (1Pz)		-NE	-NE
7302 (1Pz)		-BV	-BV
		-OR	-OR
		-TI	-TI

Cavi base tonda / Cables to round canopy



7333	W 3000
Potenza/ Power	1x29.3W 1x42.6W 1x63.0W
Lumen	1x3089lm 1x4493lm 1x6646lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

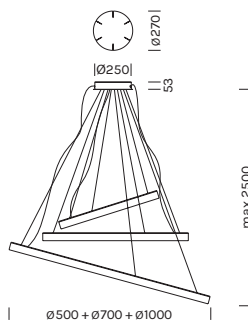


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7333	W	-BI	-BI
RS63 (1Pz)		-NE	-NE
7300 (1Pz)		-BV	-BV
7301 (1Pz)		-OR	-OR
7302 (1Pz)		-TI	-TI

Cavi soffitto / Cables straight to ceiling



7340	W 3000
Potenza/ Power	1x29.3W
Lumen	1x3089lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

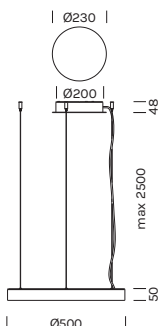

Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7340	W	-BI	-BI
RS60 (1Pz)		-NE	-NE
7300 (1Pz)		-BV	-BV
		-OR	-OR
		-TI	-TI


Il codice prodotto si compone mettendo uno dopo l'altro, da sinistra a destra, i dati nelle colonne gialle, es: 1111M12-AA
The product code is created by putting in sequence the data under the yellow columns from left to right, e.g:1111M12-AA

PRELIMINARY



Cavi soffitto / Cables straight to ceiling

7341	W 3000
Potenza/ Power	1x42.6W
Lumen	1x4493lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

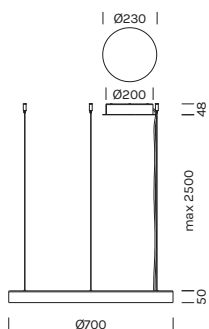


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7341	W	-BI	-BI
RS60 (1Pz)		-NE	-NE
7301 (1Pz)		-BV	-BV
		-OR	-OR
		-TI	-TI

Cavi soffitto / Cables straight to ceiling



7342	W 3000
Potenza/ Power	1x63.0W
Lumen	1x6646lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

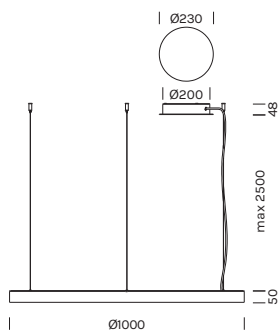


Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7342	W	-BI	-BI
RS60 (1Pz)		-NE	-NE
7302 (1Pz)		-BV	-BV
		-OR	-OR
		-TI	-TI

Cavi soffitto / Cables straight to ceiling



7343	W 3000
Potenza/ Power	1x29.3W 1x42.6W 1x63.0W
Lumen	1x3089lm 1x4493lm 1x6646lm
CRI	92
Alimentazione/ Supply	220Vac 50Hz

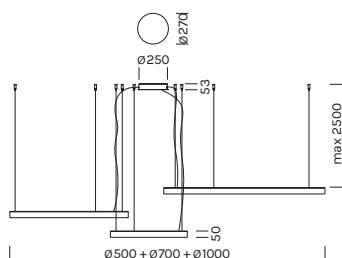

Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
7343	W	-BI	-BI
RS62 (1Pz)		-NE	-NE
7300 (1Pz)		-BV	-BV
7301 (1Pz)		-OR	-OR
7302 (1Pz)		-TI	-TI

Il codice prodotto si compone mettendo uno dopo l'altro, da sinistra a destra, i dati nelle colonne gialle, es: 1111M12-AA
The product code is created by putting in sequence the data under the yellow columns from left to right, e.g:1111M12-AA

Kit Leaf

Articolo

Item

Solo per Gavin 500

220


Only for Gavin 500



Solo per Gavin 700

221


Only for Gavin 700



Solo per Gavin 1000

222

Only for Gavin 1000

**Fogliame stabilizzato sempreverde con trattamento superficiale antistatico.**

- Composizione: foglie di Edera, Felce, Eucalipto, Ruskus, Eucalipto parvifolia, fissate a mano in Italia in modo permanente su pannello in forex da 5mm ignifugo Classe 1
- Spessore totale forex + fogliame: 8-20 cm
- Provenienza del fogliame: Europa
- Manutenzione: non necessita manutenzione, non cresce, non necessita acqua, non necessita luce. Non esporre a luce diretta del Sole. Non bagnare. Non esporre a fonti di aria forzata diretta.
- Umidità ambientale tollerata: max 50%

Evergreen stabilized foliage with antistatic surface treatment.

- *Composition: Ivy leaves, Fern, Eucalyptus, Ruskus, Eucalyptus parvifolia permanently fixed by hand on Class 1 fireproof 5mm forex panel*
- *Total thickness forex+foliage: 8-20 cm*
- *Origin of the foliage: Europe*
- *Maintenance: does not require maintenance, does not grow, does not require water, does not require light. Do not expose to direct sunlight. Do not get wet. Do not expose to direct forced air sources.*
- *Environmental humidity tolerated: max 50%*