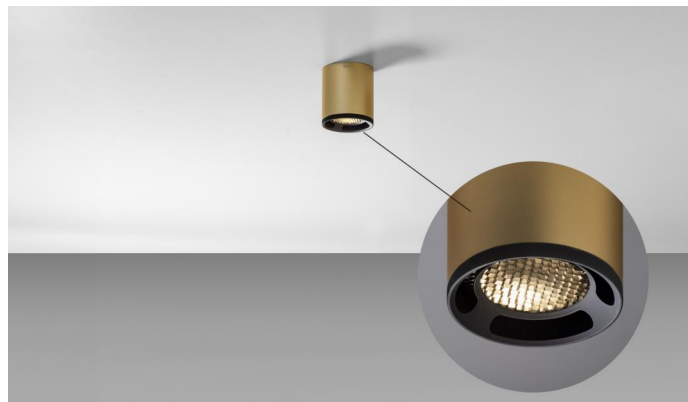



INDOOR

SOFFITTO / CEILING

BEAM STICK PL Ø80 H80

- alluminio

- aluminum

**Corpo con ghiera / Body with ring**

	M 2700K	W 3000K	N 4000K
Potenza/ Power	1x13.2W	1x13.2W	1x13.2W
Nominal lumen	1x1527lm	1x1592lm	1x1645lm
CRI	>90	>90	>90
Alimentazione/ Supply	24Vdc	24Vdc	24Vdc



Articolo Item	Temperatura Temperature	°Ottica °Optic	Ghiera Ring	Corpo Body
4247	M	12	-BO	-BO
	W	35	-NO	-NO
	N	55	-BV	-BV
			-OR	-OR
			-RR	-RR
			-TI	-TI

Necessita di driver remoto a 24Vdc
Requires 24V remote driver

Driver 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	art. alimentabili items powerable	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming
1A0150	1-2	30W	IP20	154x50x14	ON-OFF
1A1910	1-3	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-6	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-6	100W	IP20	190x65x22	PUSH DALI
1A1999	1-6	100W	IP20	201x63x30	L-C

Centraline dimmerabili in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming	
1A0837/24	144W	IP20	132x22x20	PUSH DALI 1-10V	
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0-10V 1-10V	
Controller 1 canale - DC 1-channel controller - DC	1A0172/24	288W	IP20	57x44x25	PUSH CASAMBI